

C 5G64 9 P-6006-E



parts list

300 CID

GASOLINE ENGINE

Industrial Engine Operations, Ford Parts and Service Division
P.O. BOX 3080, LIVONIA, MICHIGAN 48151

IEO 194-203
APRIL 76

GENERAL INFORMATION

This Ford Industrial Engine Parts List is designed to provide for fast and easy identification of genuine Ford parts.

Most normal replacement parts for the 300 CID engine are available from your Ford Power Products Distributor's stock. A Distributor's list, Form IEO-194-101, enclosed in a protective envelope, is included with each engine or power unit.

Models manufactured to special customer specifications are designated S.O. (Special Option) and are identified by an S.O. number following the model number. When ordering parts, always furnish the complete models, S.O., and serial numbers. Your Power Products Distributor has complete model and S.O. information and can service substituted or peculiar components of S.O. models.

LOCATING PART NUMBERS

The following procedure is recommended for locating parts in this parts list.

Example: A gasket for the cylinder head is required and the part number is not known.

1. All parts are listed in numerical sequence, except for peculiar assemblies which have all the necessary parts listed below the assembly.
2. Refer to the appropriate illustration page (in this case, page 4) containing an exploded view of the engine, head, and rocker arm cover. The basic number for the gasket is identified as 6051.
3. Refer to the Index at the front of the book for the Engine Part page number — in this case page 6 — then select the correct gasket.

When ordering parts, always indicate method of shipment: freight, air freight; express, air express; parcel post, air parcel post.

The information contained in this manual was obtained from reliable sources and is believed to be accurate as of the time of printing. Naturally, its continuing accuracy cannot be guaranteed. Industrial Engine Operations, Ford Parts Division of Ford Motor Company reserves the right to discontinue models at any time, or change specifications or design, without notice and without incurring obligation.

INDEX

	Page No.
Alternator	28
Camshaft	10
Clutch Assembly	26
Connecting Rod Bearings	9
Crankshaft	10
Cylinder Block	6
Fan Assembly	27
Filter — Engine Oil	15
Flywheel Assembly	11
Gasket — Cylinder Head	6
Main Bearings	11
Manifolds — Intake and Exhaust	27
Oil Pan Assembly	15
Pistons	8
Pump — Engine Oil	15
Pump — Water	26
Starter Motors and Drive Assemblies	33
Transmissions	20
Valves, Push Rods, Etc.	13


For balance of parts not listed in this publication, contact your local Industrial Power Products Distributor.

Note to Distributor: Refer to groups for parts not listed.


RIGHT – FRONT VIEW HIGH MOUNTED FAN

LEFT – REAR VIEW HIGH MOUNTED FAN

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		PARKING BRAKE ASSEMBLY	
		9.0 x 2.0 INTERNAL SHOE TYPE	
70/	B9T-2614-A	Drum Parking Brake	1
70/	34808-S8	Lockwasher - 7/16	4
70/	34671-S8	Nut - 7/16-20	4
70/	C3TA-2598-D	Brake Assembly	1
70/	C1TT-2A703-D	Shield - R.H.	1
70/	C1TT-2A704-D	Shield - L.H.	1
70/	8T-2056	Bolt - 1/2-20 x 1-1/4 Serrated	4
70/	34809-S8	Lockwasher - 1/2	4
70/	33846-S8	Nut - 1/2-20	4
70/	B9TZ-2A710-D	Cam and Lever Assembly	1
70/	C1TT-2780-N	Lever Assembly - Parking Brake	1
70/	20428-S8	*Bolt - 3/8-16 x 1-1/4	2
70/	34792-S36	*Lockwasher - 3/8	2
		*Attach Lever Assembly to Transmission.	
70/	372066-S8	Stud - 9/16-12-18 x 1-13/16 Drilled	1
70/	C4TZ-2A663-A	Bellcrank	1
70/	371042-S2	Flatwasher - 9/16	1
70/	33985-S8	Nut - 9/16-18 Slotted	1
70/	72035-S8	Cotter Pin - 1/8 x 1.0	1
70/	B9TZ-2630-A	Link - Parking Brake Hand Lever	2
70/	C1TT-2857-M	†Clevis	1
70/	C1TT-2857-L	†Clevis	1
		†When both clevis are assembled, the length between clevis pin hole centers should be approximately 3-19/32 inches.	
70/	73963-S8	Clevis Pin - 5/16 dia. x 1-1/2	1
70/	73896-S8	Clevis Pin - 5/16 dia. x 15/16	3
70/	72010-S8	Cotter Pin - 1/8 x 5/8	4
70/	44720-S8	Flat Washer	2

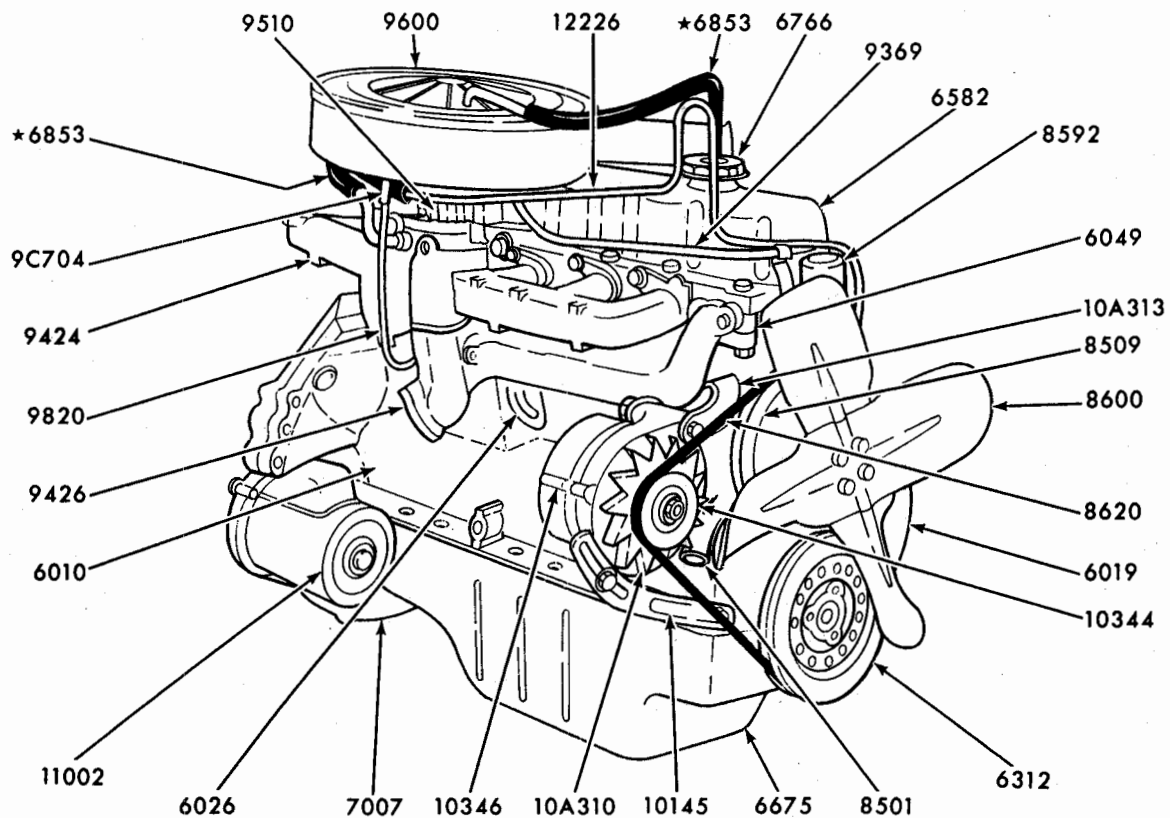

RIGHT-FRONT VIEW

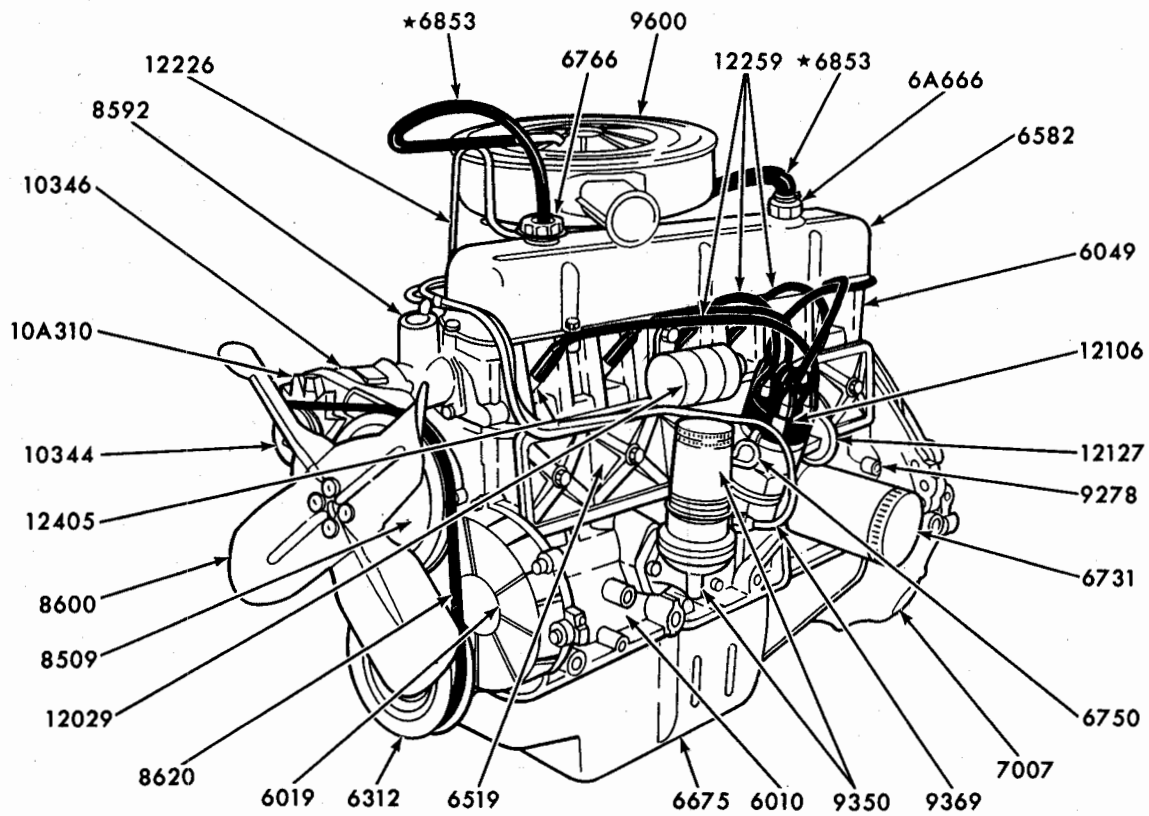


LEFT-FRONT VIEW

ENGINE ASSEMBLY-6 CYLINDER-TYPICAL

P-8395

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	C5TZ-6028-F 43039-S8 380079-S2	SUPPORT – ENGINE FRONT Support Engine Front Bolt - 7/16-14 x 7/8 Locking Washer - 7/16 Flat	1 4 4
70/75	C8AZ-6008-A	GASKET SET – ENGINE OVERHAUL Gasket Set Consists of: (1) C8AZ-6020-A Gasket (1) C9AE-6711-A Gasket (1) D2AZ-6051-A Gasket (1) C5AE-6722-A Seal (1) C5AZ-6521-A Gasket (1) C5AE-6723-A Seal (12) C5AZ-6571-D Seal (1) C2OZ-6734-A Gasket (1) D0AZ-6584-D Gasket (1) C9AZ-8255-A Gasket (1) C5AZ-6626-B Gasket (1) C5AZ-8507-A Gasket (1) C3AZ-6700-A Seal (1) A8TZ-9417-A Gasket (1) C5AZ-6701-B Seal (1) C5AZ-9461-A Gasket (1) C9AE-6710-A Gasket	1
70/	C2OZ-6A008-A	Dowel - Cylinder Head to Block - 1/2 Dia.	2
70/74 75/	D3TZ-6009-B D5TZ-6009-C	CYLINDER ASSEMBLY Cylinder Assembly – Includes Internal Components Cylinder Assembly – Includes Internal Components	1 1
70/74 75/	D3TZ-6010-A D5TZ-6010-A	CYLINDER BLOCK Block Block	1 1
70/ 70/	D2AZ-6019-A C8AZ-6020-A	FRONT COVER ASSEMBLY – TIMING GEAR Cover Assembly Gasket - Front Cover	1 1
70/ 70/ 70/ 70/ 70/ 70/ 70/	C5AZ-6026-G C5AZ-6026-H C5AZ-6026-E C5AZ-6026-F C9AZ-6026-A C9AZ-6026-B 87837-S	PLUG – ENGINE Standard - 2.078" OD - Holes in Cylinder Head and Block .060 Oversize Standard - 1.625" OD - Clean out Holes in Block .060 Oversize Standard - .259 OD - Distributor Oil Access Hole in Block .060 O/S Plug - Water Jacket, Air Brake Compressor Hole in Block, Front and Rear Main Oil Gallery - Pipe - 1/4-18	A/R A/R 5 A/R 1 A/R A/R
70/	87710-S	Plug - Main Oil Gallery and Accessory Hole in Pump - Pipe - 3/8-18	3
70/	371485-S	Plug - Core Holes in Top of Cylinder Head - Pipe - 3/4-14	4
70/ 70/ 70/	D2TZ-6049-A D2AZ-6051-A C2OZ-6065-B	CYLINDER HEAD Cylinder Head Gasket - Cylinder Head Bolt - Cylinder Head - 7/16-14 x 3-15/16	1 1 14

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	D5PZ-6E078-C	GASKET SET – LOWER Gasket Set Consists of: (1) C8AZ-6020-A Gasket (Front Cover) (1) C5AZ-6626-B Gasket (Oil Pump Inlet) (1) C3AZ-6700-A Seal (Front Cover) (1) C5AZ-6701-B Packing (Crankshaft Rear) (1) C9AE-6710-A Gasket (Oil Pan) Right (1) C9AE-6711-A Gasket (Oil Pan) Left (1) C5AE-6722-A Seal (Oil Pan) (1) C5AE-6723-A Seal (Oil Pan) (1) C2OZ-6734-A Gasket (Oil Drain Plug) (1) C5AZ-8507-A Gasket (Water Pump) (1) A8TZ-9417-A Gasket (Fuel Pump)	1
70/74	C5AZ-6079-B	GASKET SET – VALVE GRIND Gasket Set Consists of: (1) C5AZ-6051-B Gasket (Cylinder Head) (1) C5AZ-6521-A Gasket (Valve Cover) (6) B9A-6570-A Grommet (Valve Cover) (12) C5AZ-6571-A Seal (Valve Stem) (1) C5AZ-6584-B Gasket (Rocker Arm Cover) (1) C5AZ-8255-A Gasket (Water Connector) (1) C5AZ-9448-B Gasket (Manifold) (1) C5AZ-9461-A Gasket (Intake Manifold)	1
75/	D5TZ-6079-A	GASKET SET – VALVE GRIND Gasket Set Consists of: (1) D2AZ-6051-A Gasket (Cylinder Head) (1) C5AZ-6521-A Gasket (Push Rod Cover) (6) B9A-6570-A Grommet (Push Rod Cover Bolt) (12) C5AZ-6571-D Seal (Valve Stem) (6) C5TZ-6571-B Seal (Valve Stem) (1) D0AZ-6584-D Gasket (Rocker Arm Cover) (1) C9AZ-8255-A Gasket (Water Connector) (1) C5AZ-9461-A Gasket (Intake Manifold)	1

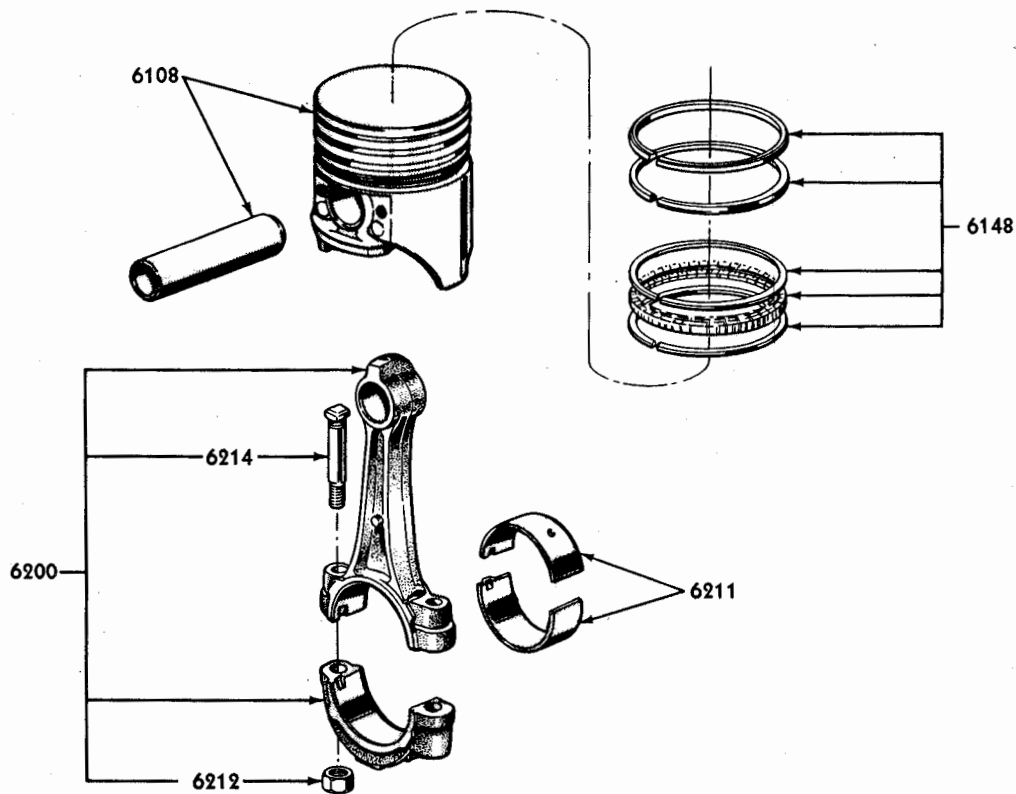


P-3732

ENGINE PISTON, CONNECTING ROD & RELATED PARTS – TYPICAL


YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/73	D1TZ-6108-G	PISTON ASSEMBLY (INCLUDING PIN) Piston - Standard	6
70/73	D1TZ-6108-J	Piston - .003 O/S	A/R
70/73	D1TZ-6108-K	Piston - .020 O/S	A/R
70/73	D1TZ-6108-L	Piston - .030 O/S	A/R
70/73	D1TZ-6108-M	Piston - .040 O/S	A/R
73/	D3TZ-6108-A	Piston - Standard	6
73/	D3TZ-6108-C	Piston - .003 O/S	A/R
73/	D3TZ-6108-D	Piston - .020 O/S	A/R
73/	D3TZ-6108-E	Piston - .030 O/S	A/R
73/	D3TZ-6108-F	Piston - .040 O/S	A/R

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/ 70/ 70/	B8A-6135-AA B8A-6135-AB B8A-6135-AC	PISTON PIN Pin - 3.17 Long - .975 OD Pin - 3.17 Long - .001 O/S Pin - 3.17 Long - .002 O/S	6 A/R A/R
70/ 70/ 70/ 70/	C3AZ-6148-F C3AZ-6148-G C3AZ-6148-H C3AZ-6148-J	PISTON RING SET CONSISTS OF NECESSARY RINGS TO RE-RING 2 PISTONS Ring Set - Piston - Standard Ring Set - Piston - .020 O/S Ring Set - Piston - .030 O/S Ring Set - Piston - .040 O/S	3 A/R A/R A/R
70/ 70/ 70/	C9TZ-6200-A C9AZ-6212-B C4OZ-6214-B	CONNECTING ROD ASSEMBLIES Rod Assembly - Connecting Nut - Connecting Rod - 3/8"-24 Hex Bolt - Connecting Rod - 3/8"-24	6 12 12
70/ 70/ 70/ 70/ 70/ 70/	C5AZ-6211-R C5AZ-6211-S C5AZ-6211-T C5AZ-6211-U C5AZ-6211-V C5AZ-6211-Y	BEARING SET – CONNECTING ROD – UPPER AND LOWER Bearing - Standard Bearing - .001 U/S Bearing - .002 U/S Bearing - .010 U/S Bearing - .020 U/S Bearing - .030 U/S	12 A/R A/R A/R A/R A/R

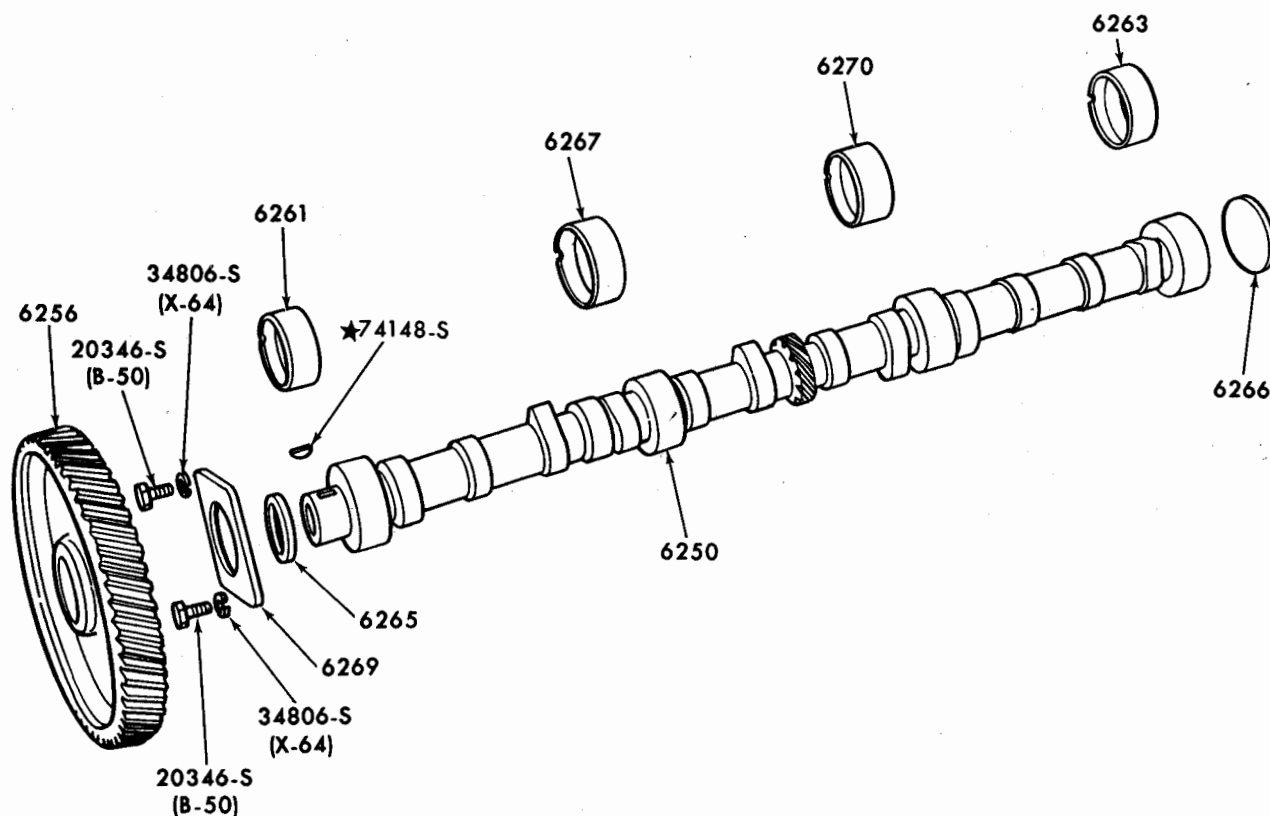

ENGINE CAMSHAFT, GEAR, BEARINGS & RELATED PARTS – TYPICAL

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/ 70/ 70/ 70/ 70/ 70/	D5TZ-6250-A C5TZ-6256-A C5AZ-6265-A C5AZ-6266-A C5AZ-6269-A 20346-S8	CAMSHAFT ASSEMBLY Camshaft Assembly - Less Gear - Induction Hardened Gear - Camshaft - 92 Teeth Cast Iron Spacer - Cam Gear - 1-1/2" OD - 1-1/4" ID Plug - Cam Rear Bearing - 2.199" OD Plate - Cam Thrust - 1-5/8" ID - 13/64" Thick Bolt - Plate to Block - 5/16"-18 x 3/4"	1 1 1 1 1 2
70/ 70/	D5TZ-6262-B D5TZ-6262-C	CAMSHAFT BEARINGS Camshaft Bearing - Standard Camshaft Bearing - .015 Undersize	4 A/R

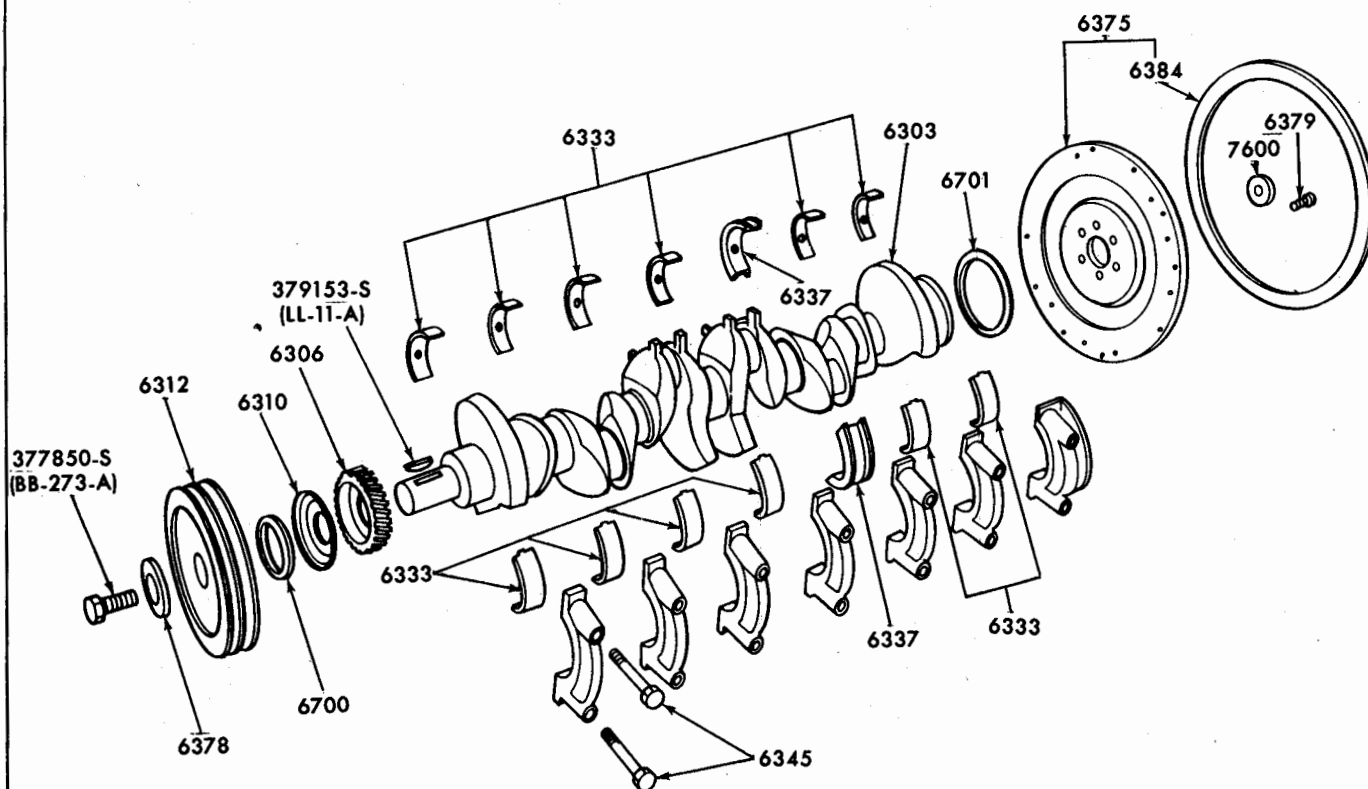


ENGINE CRANKSHAFT, FLYWHEEL & RELATED PARTS - TYPICAL

70/72 72/ 70/ 70/	C5TZ-6303-C D2TZ-6303-D C5TZ-6306-B 379153-S	CRANKSHAFT ASSEMBLY Crankshaft - Cast Iron Crankshaft - Cast Iron Gear - Crankshaft Key - Pulley to Crankshaft - 3/16" x 1-3/4"	1 1 1 1
70/	C5TZ-6312-D	CRANKSHAFT PULLEY - INCLUDES DAMPER Pulley - Crankshaft - Double Sheave - ID Marking (C5TE-6316-F) and Orange Paint on Damper - 6-45/64" Dia. Pulley Uses 3/8" Belts - Order through Industrial Only	1
70/ 70/ 70/	C5JZ-6A312-A 42999-S8 C3OZ-6378-A	Pulley - Assembly Crankshaft - Outer Bolt - 3/8"-16 x 1.12" Self Locking Washer - Crankshaft Pulley Retaining	1 3 1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	CRANKSHAFT MAIN BEARINGS		
	LOWER		
	SIZE	FRONT FRONT INTERMEDIATE INTERMEDIATE CENTER REAR INTERMEDIATE REAR INTERMEDIATE REAR	
	Std.	C5TZ-6333-AA C5TZ-6333-AA C5TZ-6333-AA C5TZ-6333-AA C6AZ-6337-G C5TZ-6333-AA C5TZ-6333-AA	
	.001"	C5TZ-6333-AB C5TZ-6333-AB C5TZ-6333-AB C5TZ-6333-AB C6AZ-6337-M C5TZ-6333-AB C5TZ-6333-AB	
	.002"	C5TZ-6333-AC C5TZ-6333-AC C5TZ-6333-AC C5TZ-6333-AC C6AZ-6337-H C5TZ-6333-AC C5TZ-6333-AC	
	.010"	C5TZ-6333-AD C5TZ-6333-AD C5TZ-6333-AD C5TZ-6333-AD C6AZ-6337-J C5TZ-6333-AD C5TZ-6333-AD	
	.020"	C5TZ-6333-AE C5TZ-6333-AE C5TZ-6333-AE C5TZ-6333-AE C6AZ-6337-K C5TZ-6333-AE C5TZ-6333-AE	
	.030"	C5TZ-6333-AF C5TZ-6333-AF C5TZ-6333-AF C5TZ-6333-AF C6AZ-6337-L C5TZ-6333-AF C5TZ-6333-AF	
	UPPER		
	SIZE	FRONT FRONT INTERMEDIATE INTERMEDIATE CENTER REAR INTERMEDIATE REAR INTERMEDIATE REAR	
	Std.	D0TZ-6333-C D0TZ-6333-C D0TZ-6333-C D0TZ-6333-C D0TZ-6337-C D0TZ-6333-C D0TZ-6333-C	
	.001"	D0TZ-6333-D D0TZ-6333-D D0TZ-6333-D D0TZ-6333-D D0TZ-6337-D D0TZ-6333-D D0TZ-6333-D	
	.002"	D0TZ-6333-E D0TZ-6333-E D0TZ-6333-E D0TZ-6333-E D0TZ-6337-E D0TZ-6333-E D0TZ-6333-E	
	.010"	D0TZ-6333-F D0TZ-6333-F D0TZ-6333-F D0TZ-6333-F D0TZ-6337-F D0TZ-6333-F D0TZ-6333-F	
	.020"	D0TZ-6333-G D0TZ-6333-G D0TZ-6333-G D0TZ-6333-G D0TZ-6337-G D0TZ-6333-G D0TZ-6333-G	
	.030"	D0TZ-6333-H D0TZ-6333-H D0TZ-6333-H D0TZ-6333-H D0TZ-6337-H D0TZ-6333-H D0TZ-6333-H	
70/	C5TZ-6375-B	FLYWHEEL AND RING GEAR ASSEMBLY Flywheel - 184 Tooth - Ring Gear - 14/27/32" Dia. For 12" Clutch	1
70/	378223-S	Bolt - 7/16"-20 x 1.62 Hex - Locking	6
70/	C7AP-6375-D	Flywheel Assembly - 184 Tooth for Converter Assembly	1
70/	378171-S	Bolt - 7/16"-20 x .83	6
70/	C5TZ-7902-B	Converter Assembly	1
70/	378941-S8	Nut - Attach Converter to Flywheel	4
70/	C2OZ-6A366-A	Plate - Flywheel Reinforcing	1
70/	C5AZ-6384-A	Flywheel Ring Gear - 184 Tooth	1
70/	C5JZ-6392-B	FLYWHEEL HOUSING WITH FEET AND FLYWHEEL ASSEMBLY Housing - Flywheel - SAE 3	1
70/	C5JZ-6392-A	Housing - Flywheel - SAE 4	1
70/	43044-S8	Bolt - 7/16-14 x 1.5 Locking Attach Housing to Cylinder Block	2
70/	43040-S8	Bolt - 7/16-14 x 1.0 Locking Attach Housing to Rear Engine Plate	6
70/	C5JZ-7518-A	Cover - Inspection Hole	1
70/	57631-S8	Screw and Washer - 5/16-18 x .50 Attach Cover to Housing	4
70/	EAD-6397-A	Dowel Pin - 1/2 x 1.0 Assemble in Dowel Hole Above Starting Motor	1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		FLYWHEEL HOUSING WITH FEET AND FLYWHEEL ASSEMBLY – Continued	
70/	C5JZ-7007-A	Plate - Engine Rear	1
70/	43040-S8	Bolt - 7/16-14 x 1.0 Locking Attach Rear Engine Plate to Cylinder Block	4
70/	C5JZ-6375-B	Flywheel Assembly - 11-1/2 O.C. Clutch	1
70/	378769-S	Bolt - 7/16-20 x 1.06 Locking Attach Flywheel to Crankshaft	6
70/	C5JZ-7599-A	Adaptor - Flywheel to Pilot Bearing	1
70/	42998-S8	Bolt - 3/8-16 x 1.0 Locking Attach Adaptor to Flywheel	3
		CLUTCH HOUSING AND RELEASE LEVER FOUR AND FIVE SPEED TRANSMISSION	
70/	C5TZ-7505-E	Housing Assembly - Clutch	1
70/	302555-S8	*Bolt - 7/16-14 x 3.75	6
70/	34808-S8	*Lockwasher - 7/16 *Attach Clutch Housing to Rear Engine Plate and Cylinder Block.	6
70/	C5TZ-7564-C	Front Dust Cover	1
70/	20388-S8	†Bolt - 3/8-16 x 1.00	2
70/	34792-S36	†Lockwasher - 3/8 †Attach Front Dust Cover to Housing on L.H. Side	2
70/	C5TZ-7564-B	Lower Dust Cover	1
70/	57631-S2	\$Screw and Washer Assembly - 5/16-18 x 1/2 \$Attach Lower Dust Cover	5
70/	C4TZ-7513-C	Dust Shield	1
70/	354320-S8	@Stud - 9/16-12-18 x 2.56	2
70/	34810-S8	@Washer - 9/16 Lock	2
70/	33848-S8	@Nut - 9/16-18 @Install in Upper Transmission Mounting Holes	2
70/	EAD-6397-A	Dowel Pin	1
70/	379272-S2	Screw - Self-tapping	2
70/	B8C-7515-A	Lever Assembly - Clutch Release	1
70/	C5TZ-7007-E	Plate Assembly - Engine Rear	1
70/	43040-S8	%Bolt - 7/16-14 x 1.00 Locking %Attach Rear Engine Plate to Cylinder Block	3
70/	C5TZ-6375-B	Flywheel Assembly - 12 Inch Clutch	1
70/	378223-S	Bolt - 7/16-20 x 1.62 Locking	6
70/	C5TZ-7600-B	Bearing - Clutch Pilot	1
70/	C5TZ-7600-C	Bearing - Clutch Pilot	1
70/	C5TA-7550-L	Disc Assembly - Clutch	1
70/	C5TA-7563-F	Plate and Cover Assembly - Clutch Pressure	1
70/	382087-S2	*Bolt - 5/16-18 x .92 Shoulder	6
70/	34846-S8	*Washer - 5/16 Lock *Attach 7563 to 6375.	6

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/ 70/ 70/ 70/ 70/ 70/	C5JZ-7976-A 57665-S2 34808-S8 C5AZ-7986-A 57631-S8 D2TZ-7007-A	CONVERTER HOUSING AND REAR ENGINE PLATE Converter Housing Bolt - 7/16-14 x 2.50 Washer - 7/16 Lock Cover - Front Dust Bolt and Washer Assembly - 5/16-18 x 1/2 Plate - Engine Rear	1 6 6 1 3 1
70/	D1AZ-6500-A	HYDRAULIC TAPPET ASSEMBLY Tappet Assembly	12

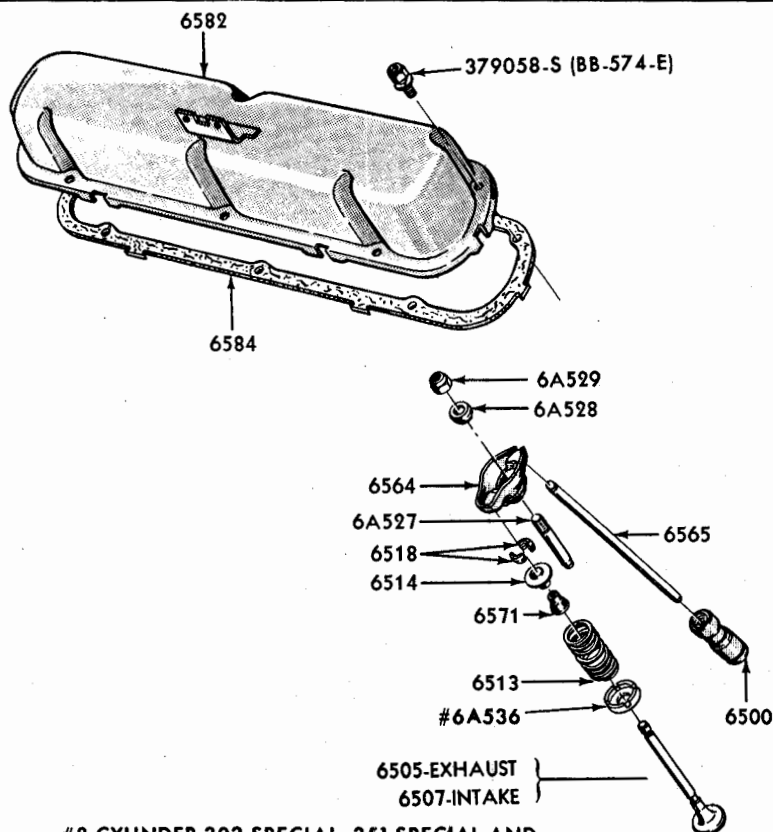


#8 CYLINDER 302 SPECIAL, 351 SPECIAL AND
429 SPECIAL ENGINES ONLY

ENGINE VALVES, PUSH RODS, ROCKER ARM COVER & RELATED PARTS – TYPICAL


70/ 70/ 70/ 70/	D5TZ-6505-N D5TZ-6505-P D5TZ-6505-R D5TZ-6505-S	VALVES – EXHAUST Valve - Standard Valve - .003" O/S Valve - .015" O/S Valve - .030" O/S	6 A/R A/R A/R
70/ 70/ 70/ 70/	C5TZ-6507-A C5TZ-6507-B C5TZ-6507-C C5TZ-6507-D	VALVES – INTAKE Valve - Standard Valve - .003" O/S Valve - .015" O/S Valve - .030" O/S	6 A/R A/R A/R

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	C5AZ-6513-A	VALVE RETAINERS, LOCKS, SPRINGS Valve Spring - Intake	6
70/	C5TZ-6513-A	Valve Spring - Exhaust	6
70/	D0TZ-6514-A	Retainer - Valve Spring - Exhaust	6
70/	C7AZ-6514-A	Retainer - Valve Spring - Intake	6
70/	7HA-6518-A	Lock Key - Valve Spring Retainer - Intake and Exhaust	24
70/	C5AZ-6519-B	COVER - VALVE PUSH ROD Cover - Push Rod	1
70/	20386-S8	Bolt - 5/16-18 x 1.0	6
70/	C5AZ-6521-A	Gasket - Push Rod Cover	1
70/	C5AZ-6A527-A	Stud - Valve Rocker Arm Support - 3/8-24 x 2-5/8	12
70/	C2OZ-6A528-C	Seal - Rocker Arm Fulcrum	12
70/	C2DZ-6A529-A	Nut - Rocker Arm Stud - 3/8-24	12
70/	C5AZ-6564-A	Arm - Valve Rocker	12
70/	C5AZ-6565-A	Rod - Valve Push	12
70/	B9A-6570-A	Grommet - Push Rod Cover Stud or Bolt	6
70/	C5AZ-6571-D	Valve Stem Seals	12
70/	C8AZ-6582-A	Cover - Rocker Arm - Primed	1
70/	20326-S7-8	Bolt - Cover to Head - 5/16-18 x 5/8	8
70/	34806-S7	Washer - 5/16	8
70/	D0AZ-6584-D	Gasket - Rocker Cover - Cork	1

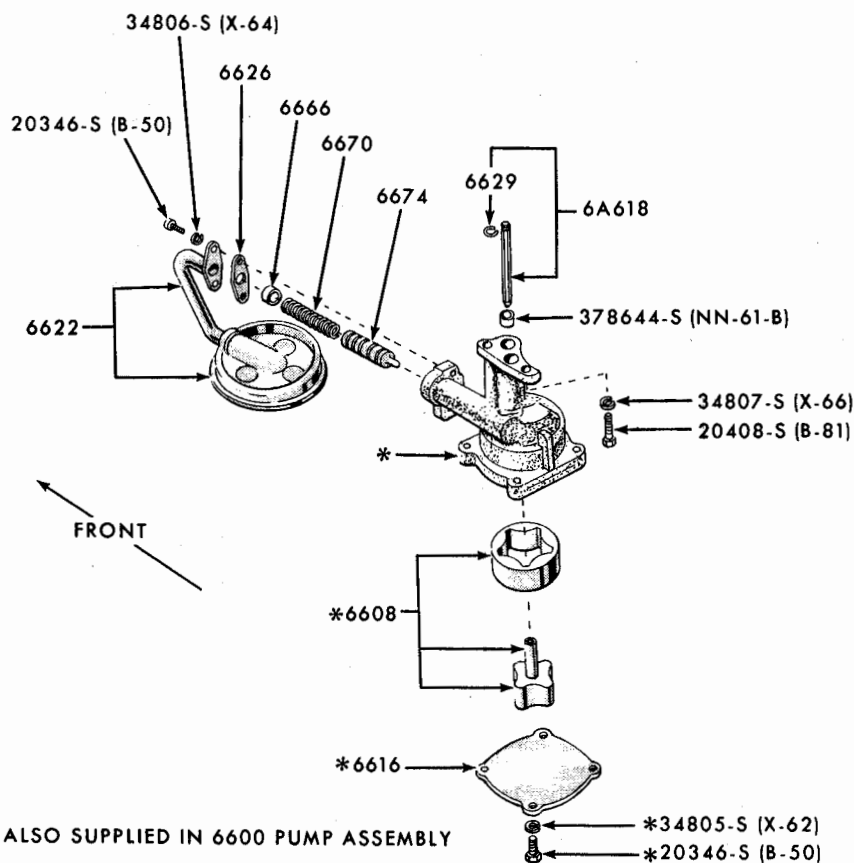


ENGINE OIL PUMP & RELATED PARTS

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		PUMP ASSEMBLY – ENGINE OIL – INCLUDES GASKET	
70/	C5AZ-6600-A	Pump Assembly	1
70/	378644-S	Dowel - Pump to Block - 1/2 x 13/32	1
70/	C4TZ-6608-A	Rotor and Shaft Assembly - Oil Pump Drive	1
70/	B8A-6616-C	Plate Assembly - Pump Cover	1
70/	42911-S	Bolt - Plate to Pump - 1/4-20 x 5/8	4
70/	C5AZ-6A618-A	Shaft Assembly - Pump Intermediate - 4.52 Long With Retainer	1
70/	C5TZ-6622-B	Screen, Tube and Cover Assembly	1
70/	33799-S8	Nut - Screen to Stud - 3/8-16	1
70/	34807-S8	Washer - 3/8	1
70/	D5TZ-6626-A	Gasket - Oil Pump Inlet Tube	1
70/	C4AZ-6629-A	Ring - Pump Intermediate, Shaft Retainer	1
70/	C5AZ-6670-A	Spring - Pump Body Relief Valve - 3-1/32 x 3/4	1
70/	C5AZ-6674-A	Plunger - Relief Valve - 3/4 x 2-1/4	1
70/	C5TZ-6675-D	Pan - Engine Oil	1
70/	34806-S	Washer - Lock	25
70/	20326-S	Screw - Oil Pan Attaching 5/16-18 x 5/8	25
70/	C3AZ-6700-A	Oil Seal - Cylinder Front Cover	1
70/	C5AZ-6701-B	Oil Seal - Rear Crankshaft	1
70/	D1AZ-6730-B	Plug - Engine Oil Pan Drain - Includes C2OZ-6734-A Gasket	1
70/	C1AZ-6731-A	Filter - Engine Oil - Spin On	1
70/	C2OZ-6734-A	Gasket - Oil Pan Drain Plug - .508 ID, .82 OD, .076 Thick Nylon	1
70/	C5TZ-6750-J	Indicator - Oil Level - 12.52 Top of Shield to Full	1
70/	C7JZ-6784-A	Tube - Oil Level Indicator	1
70/	C6JZ-6763-C	Tube - Oil Filler	1
70/	381898-S	Grommet - Rocker Arm Cover	1
70/	D2AE-6766-MA	Breather Cap	1
70/	C1TZ-6766-A	Breather Cap	1
70/	87616-S8	Plug - Pipe 1/4-18 - Plug Hole in Intake, Below Carb.	1
70/	D1AZ-6890-A	Insert - Oil Filter Adapter Mount	1
		GASKET SET – ENGINE OIL PAN	
70/	D0AZ-6781-B	Gasket Set Consists of: (1) C9AE-6710-A Gasket (R.H.) (1) C9AE-6711-A Gasket (L.H.) (1) C5AE-6722-A Seal (1) C5AE-6723-A Seal (1) C2OZ-6734-A Gasket	1

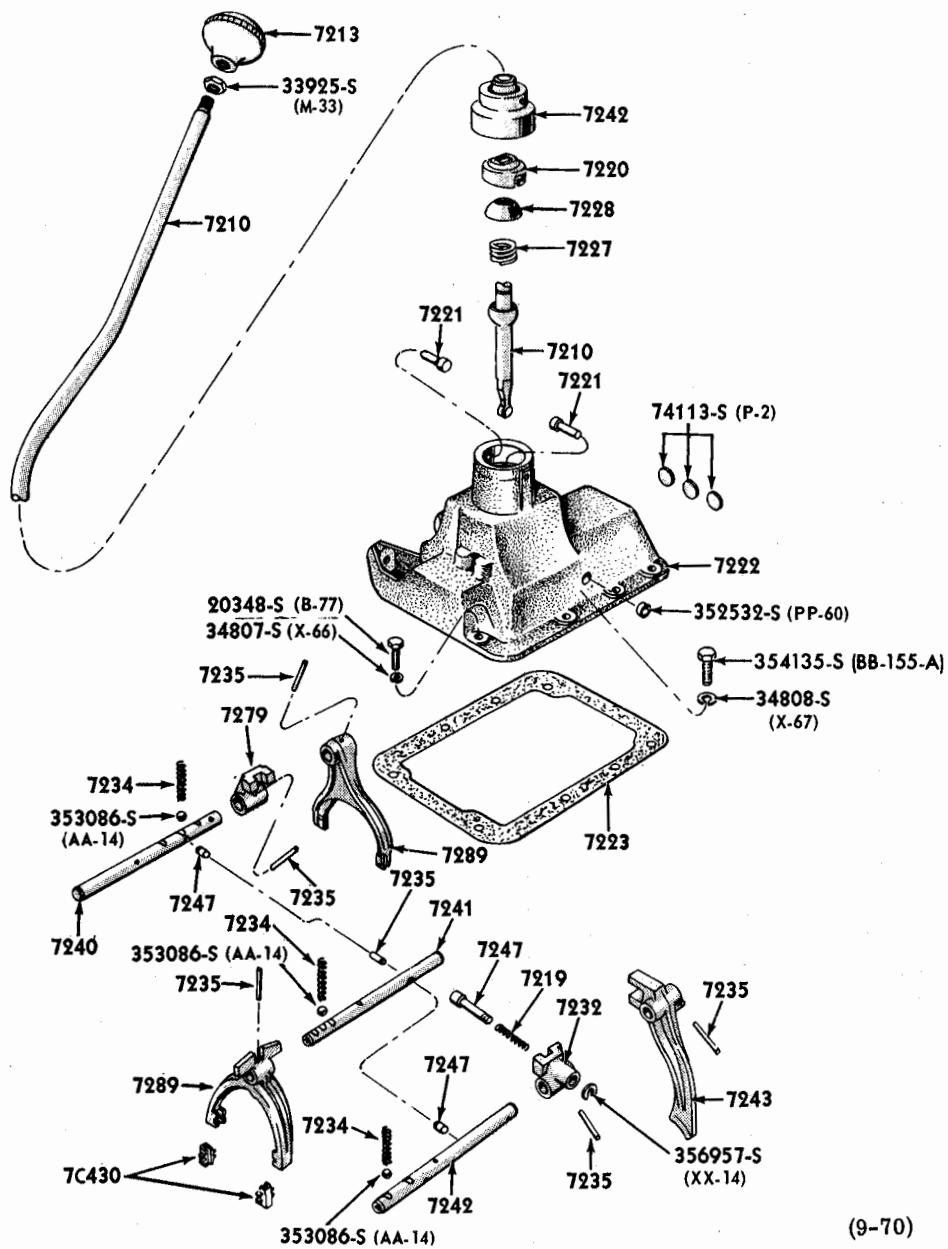


GEAR SHIFT MECHANISM—4 SPEED HELICAL (NEW PROCESS 435)—D1TZ-7004-A

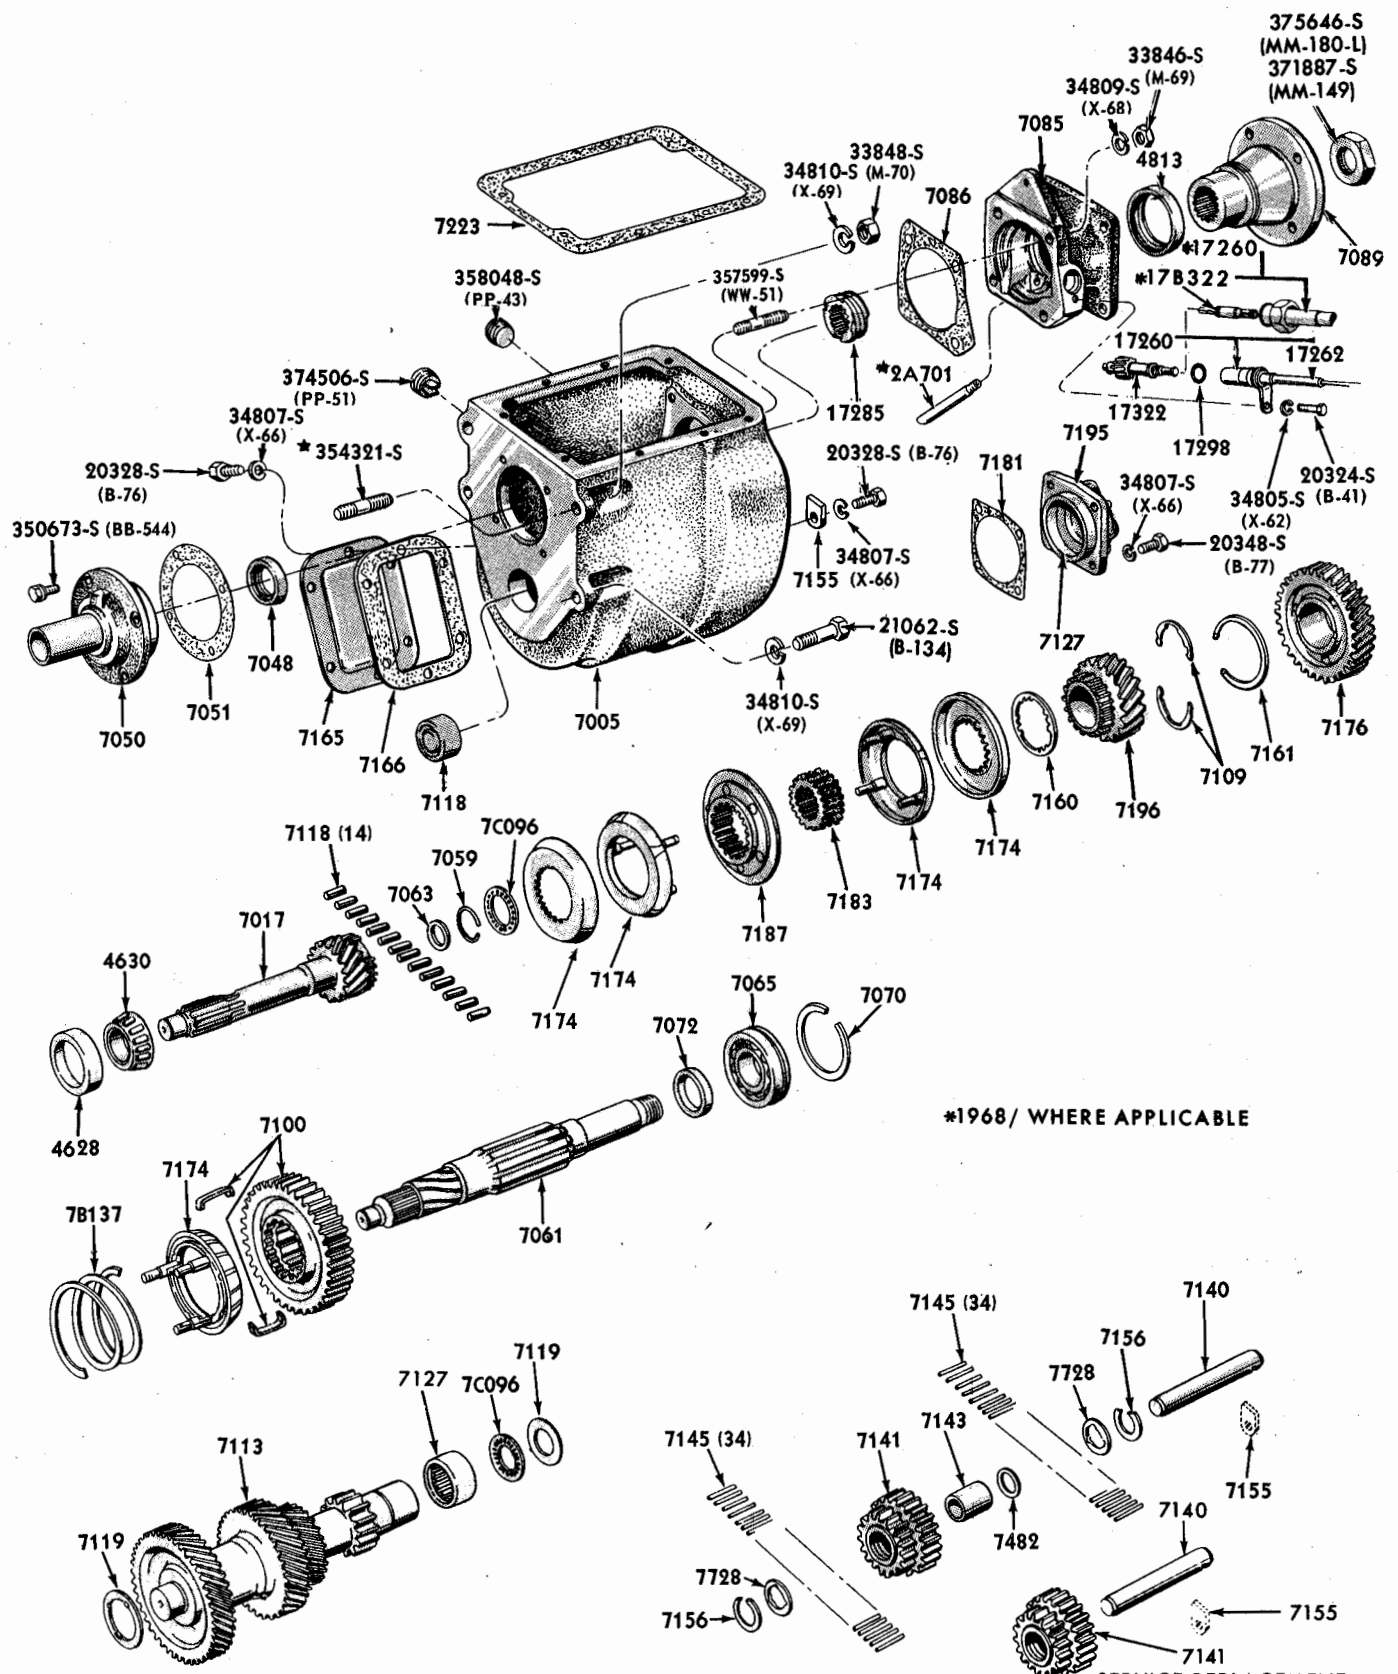

*1968/ WHERE APPLICABLE

SERVICE REPLACEMENT
REVERSE IDLER GEAR ASSEMBLY

TRANSMISSION-4 SPEED SYNCHRO. HELICAL GEAR (NEW PROCESS 435)-D1TZ-7004-A

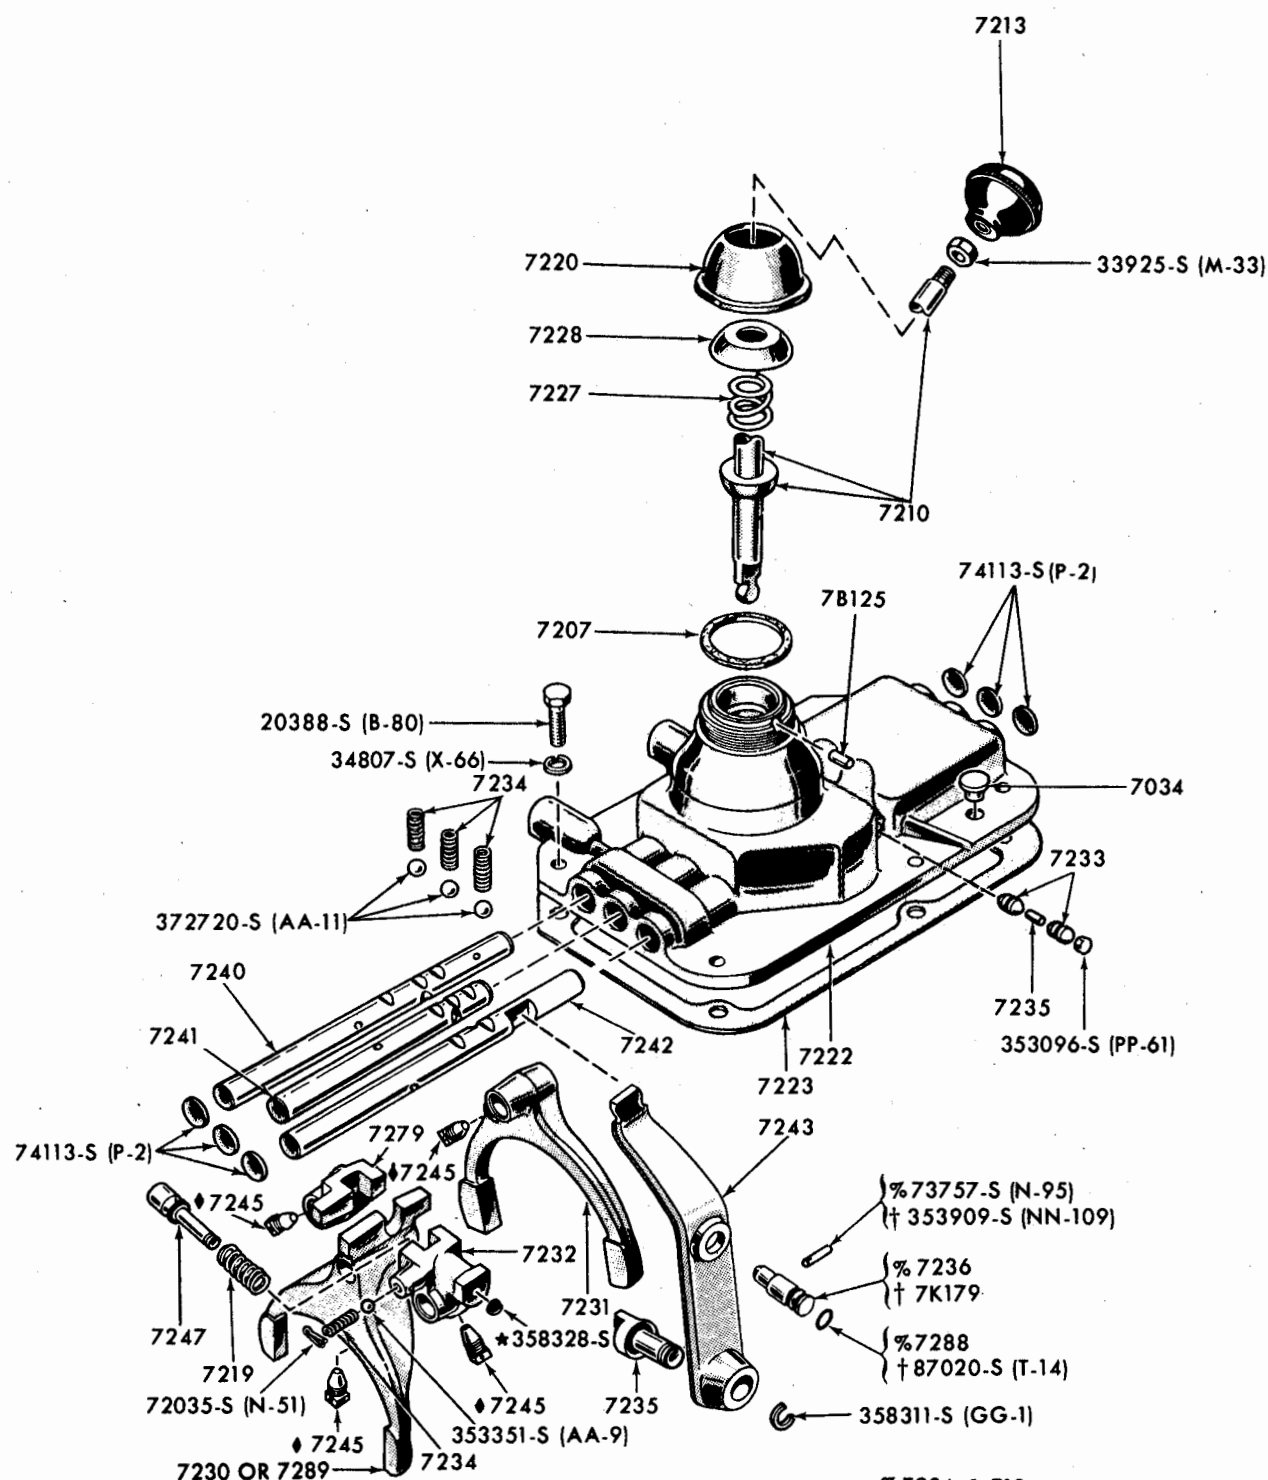


♦ USED WITH T98A & T18 TRANSMISSIONS 1964/1968

♦ PIN 305078-S (NN-109-D) USED WITH T18 & T19 TRANSMISSIONS 1968/

P-2059

GEARSHIFT MECHANISM (4 SPEED HELICAL GEAR)-WARNER GEAR T18-TYPICAL



YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		TRANSMISSION ASSEMBLY – 4-SPEED CENTER SHIFT – NEW PROCESS 435	
70/	D1TZ-7004-A	Transmission Assembly	1
70/	304819-S2	Bolt - 9/16-12 x 1-7/8	2
70/	34810-S8	Lockwasher - 9/16	2
70/	D1TZ-7548-B	Bearing and Hub Assembly - Clutch Release	1
70/	C8TZ-17297-A	Sleeve Assembly - Speedometer Gear	1
70/	C4TZ-17285-B	Gear - Speedometer Drive - 5 Teeth	1
70/	B8T-17322-C	Gear - Speedometer Driven - 15 Teeth	1
70/	20324-S8	Bolt - 1/4-20 x 5/8	1
70/	34805-S8	Lockwasher - 1/4	1
70/	C5TZ-7089-A	Flange - Output	1
70/	D2JL-7210-A	Lever Assembly - Gearshift	1
70/	C4TZ-7213-A	Ball Assembly - Gearshift Lever	1
70/	33925-S8	Nut - 3/8"-24 Jam	1
70/	B8T-7242-A	Boot - Gearshift Lever to Housing	1
70/	B8T-7220-A	Cap - Transmission Gearshift Lever	1
70/	B8T-7228-A	Seat - Transmission Gearshift Spring	1
70/	B8T-7227-A	Spring - Transmission Gearshift Lever	1
	D1TZ-7004-A		
	Consists of:		
	C0DW-4628-A	Cup - Input Shaft Bearing - 2.8443 OD, .7812 Wide	1
	C0DW-4630-A	Bearing Assembly - Input Shaft	1
	D2TZ-4813-A	Oil Seal - Output Shaft Bearing Retainer - 3-1/4 OD, 2-1/2 ID, 1/2 Thick	1
	C4TZ-7005-A	Case	1
	374506-S	Plug - Drain - Magnetic - 3/4-14	1
	358048-S	Plug - Filler - 3/4-14	1
	21062-S7-8	Bolt - 9/16-12 x 2 Hex Head	2
	354321-S	Stud - 9/16-12 x 9/16-18 x 2.44 Long	2
	34810-S	Lockwasher - 9/16	4
	33848-S7	Nut - 9/16-18	2
	C4TZ-7017-A	Shaft - Input - 17 Helical Teeth - 24 Clutch Teeth - 10 Splines - 9-3/8 Long	1
	C4TZ-7048-A	Oil Seal - Input Shaft	1
	C4TZ-7050-A	Retainer - Input Bearing - 4-11/32 Overall Length - 5.124 Flange OD, 2.8428 Flange I.D.	1
	350673-S	Bolt - Retainer to Case - 5/16-18 x 3/4	4
	C4TZ-7051-A	Gasket - Input Shaft Bearing Retainer	2
	C4TZ-7059-A	Snap Ring - Pilot Roller Bearing Retainer - 1.685 Free OD, .093 Dia. - Spring Steel	1
	C5TZ-7061-H	Shaft - Output - 13.59 Long - 10 Splines - 35 Serrations - Both Ends - Includes (1) Each C5TZ-7119-A Washer and 371887-S Nut	1
	371887-S	Nut (Output Shaft) - 1"-20 Hex Lock - Across Flats 1-1/2"	1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		TRANSMISSION ASSEMBLY – 4 SPEED CENTER SHIFT – NEW PROCESS 435 – Continued	
	372040-S	Nut - 1-1/4-18 - Across Flats 2"	1
	C4TZ-7063-A	Spacer - Input Shaft Bearing to Inner Race - 1.543 OD, 1.25 ID, .062 Thick	1
	C4TZ-7065-A	Bearing - Output Shaft Rear - 3.543 OD, 1.574 ID, .905 Wide	1
	7EQ-7070	Snap Ring - Output Shaft Bearing Retainer - .097 Thick	1
	C4TZ-7072-A	Spacer - Output Shaft to Rear Bearing - 2.25 OD, 2 ID, .338 Wide	1
	C5TZ-7E082-A	Spring - Sliding Gear Tension	2
	C8TZ-7085-F	Retainer Assembly - Output Shaft Bearing - 1"-20 Tapped Hole	1
	33846-S8	Nut - 1/2-20 Hex	4
	34809-S8	Lockwasher - 1/2	4
	357599-S2	Stud - 1/2-13 and 1/2-20 x 1-3/4	4
	B9TZ-7086-A	Gasket - Output Shaft Bearing Retainer	1
	C4TZ-7C096-A	Bearing - Countershaft Thrust Rear - 1.922 OD, 38 Rollers, .078 Thick	1
	C4TZ-7C096-C	Countershaft Thrust Rear - 2.171 OD, 27 Rollers - .156 Thick	1
	C4TZ-7100-K	Gear - Low and Reverse Sliding - 37 Spur Teeth, 27 Clutch Teeth, 10 Splines, 6.417 OD - Included (2) C5TZ-7E082-A Spring and (1) C4TZ-7100-J Gear	1
	B7T-7109-A	Ring - Output Shaft Second Speed Gear Split Retaining - 1.809 ID, 2.333 OD, .0745 Thick	2
	C4TZ-7113-A	Gear - Countershaft Cluster - 11.30 Long, 43-35-25 Helical Teeth - 14 Spur Teeth	1
	B7T-7118-A	Roller - Input Shaft Pilot Bearing - .2811 OD, .678 Long	14
	C4TZ-7118-A	Bearing Assembly - Countershaft Front Radial - 1.8755 OD, 1.500 ID, 1" Thick	1
	C4TZ-7119-A	Washer - Countershaft Cluster Gear Thrust - Front 2.75 OD, 1.90 ID, .062 Thick - 4 Oil Grooves	1
	C4TZ-7119-B	Washer - Countershaft Cluster Gear Thrust - Rear 1.917 OD, 1.257 ID, .031 Thick	1
	C5TZ-7119-A	Washer - Countershaft Gear Thrust - 1.75 OD, 1" ID, .156 Wide	1
	C4TZ-7127-A	Bearing Assembly - Countershaft - Rear - 2.3755 Major Dia. 2.00 ID, 1" Wide	1
	C4TZ-7B137-A	Spring - Synchronizer Blocking - 4" ID, 4.88 Free Length, 2-1/2 Active Coils - .46 x .225 Wide Spring Steel	1
	C4TZ-7140-A	Shaft - Reverse Idler Gear - 5-11/32 Long, .9877 Dia.	1
	D0TZ-7141-A	Gear - Reverse Idler - 17-21 Teeth - 3.893 OD, 1.481 ID with Bearing	1


YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		TRANSMISSION ASSEMBLY – 4 SPEED CENTER SHIFT – NEW PROCESS 435 – Continued	
	C4TZ-7153-B	Gasket Set	1
	C4TZ-7155-A	Plate - Countershaft and Reverse Idler Shaft Lock 7/8 Wide, 1/8 Thick, 1-1/8 Overall Length	1
	20328-S8	Bolt - Lock Plate to Case - 3/8-16 x 5/8	1
	34807-S8	Lockwasher - 3/8	1
	B7T-7160-A	Shim - Synchronizer to Output Shaft and Third Speed Idler Gear - .010 Thick	A/R
	B7T-7160-B	Shim - Synchronizer to Output Shaft and Third Speed Idler Gear - .015 Thick	A/R
	C4TZ-7161-A	Snap Ring - Output Shaft Second Speed Gear - 3.43 OD, 3.054 ID, .065 Thick	1
	BB-7165	Cover - Power Take-Off	1
	20328-S8	Bolt - Cover to Case - 3/8-16 x 5/8	6
	34807-S8	Lockwasher - 3/8	6
	B9TT-7166-C	Gasket - Power Take-Off Cover	1
	D3TZ-7174-A	Ring - Synchronizer Outer Stop - 24 Splines - Third and Fourth	2
	B7T-7174-B	Ring and Pins - Synchronizer Inner Stop - 4.65 OD, Third and Fourth	2
	C4TZ-7174-A	Ring - Synchronizer Inner Stop and Clutch Pin - 5.0597 OD	1
	C4TZ-7176-A	Gear - Output Shaft Second Speed - 33 Helical Teeth, 27 Clutch Teeth, 5.105 OD, 2.1268 ID	1
	C4TZ-7181-A	Gasket - Countershaft Rear Bearing Cap - 3.19 ID, .010 Thick, (4) .41 Bolt Holes	1
	C4TZ-7183-B	Hub - Third and Fourth Gear Synchronizer Clutch - 24 External Teeth, 35 Internal Splines Includes (1) C4TZ-7C096-C Bearing	1
	B7T-7187-A	Sleeve - Synchronizer Sliding - 24 Teeth	1
	C4TZ-7195-A	Cap - Countershaft Rear Bearing	1
	20348-S8	Bolt - Cap to Case - 3/8-16 x 3/4	4
	34807-S8	Lockwasher - 3/8	4
	C4TZ-7196-A	Gear - Output Shaft Third Speed Idler - 23 Helical Teeth - 24 Spur Teeth - 3.723 OD, 1.714 Overall Thickness	1
	C1TT-7207-A	Gasket - Gear Shift Lever Housing to Gear Shift Housing	1
	7EQ-7219	Spring - Reverse Shift Lug - 1/2 OD, 1-9/16 Free Length	1
	D2TZ-7221-A	Trunnion - Cover - 1-3/16 Long, 5/16 Dia. One End, 1/4 Dia. Other End	2

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		TRANSMISSION ASSEMBLY – 4 SPEED CENTER SHIFT – NEW PROCESS 435 – Continued	
	D2TZ-7222-D	Housing - Gearshift	1
	20348-S8	Bolt - Housing to Case - 3/8-16 x 3/4	6
	34807-S8	Lockwasher - 3/8	6
	34808-S8	Lockwasher - 7/16	2
	74113-S	Plug - 25/64	3
	352532-S	Plug - 3/8	1
	354135-S7-8	Bolt - Housing to Case - 3/8-16 x 1-1/8	2
	C4TZ-7223-A	Gasket - Gearshift Housing - 10.69 Long, 8.32 Wide, (8) Bolt Holes	1
	C4TZ-7232-A	Gate - Gearshift Reverse - Front	1
	TYAA-7234-A	Spring - Gearshifter Shafts Poppet - 7 Active Coils - 23/64 OD, 1" Long	3
	372720-S	Ball - Shifter Shaft Poppet - 3/8	3
	C4TZ-7235-A	Pin - Shifter Interlock - 1" Long, .177 OD - Chamfer On One End Only	5
	TYAA-7235-A	Gearshifter Shaft Interlock - .186 OD, 33/64 Long	1
	C4TZ-7240-A	Shaft - First and Second Gearshifter - 8.15 Long, .6213 Dia.	1
	D2TZ-7241-B	Shaft - Third and Fourth Gearshifter - 8.63 Long, .6213 Dia.	1
	C7TZ-7242-A	Shaft - Reverse Gearshift - 8.69 Long, .6213 Dia.	1
	C4TZ-7243-A	Arm - Gear Shift, Reverse Fork	1
	C4TZ-7247-A	Plunger - Shifter Shaft Interlock - .599 Long, .374 Dia. - Rounded Ends	2
	C9TZ-7247-A	Reverse Shift Lug	1
	356957-S	Washer - Reverse Shift Lug Plunger - "C" Type - 5/8 Wide, 7/32 Opening, 1/16 Thick	1
	C4TZ-7279-A	Gate - First and Second Gearshifter Shaft	1
	C4TZ-7289-D	Fork - First and Second Gearshifter - Includes Nylon Inserts	1
	C4TZ-7289-B	Fork - Third and Fourth Gearshifter	1
	C4TZ-7B331-B	Kit - Small Parts Repair	1
	D4HZ-7C391-D	Kit - Bearing and Gasket (Overhaul)	1
	C2TZ-7C430-A	Insert - Third and Fourth Gearshifter Forks - 3/4 Long, 1/2 Overall Width	2
	D2TZ-7C430-A	Insert - First and Second Gearshifter Fork - 3/4 Long, .30 Wide, 1/4 Thick - Nylon	2

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		TRANSMISSION ASSEMBLY – 4 SPEED CENTER SHIFT – WARNER T-18	
73/	D3JL-7004-A	Transmission Assembly	1
73/	304819-S2	*Bolt 9/16-12 x 1.875	2
73/	34810-S8	*Washer 9/16 Lock	2
		*Attach Trans. to Clutch Housing	
73/	D1TZ-7548-B	Bearing and Hub Assembly - Clutch Release	1
73/	20328-S8	†Bolt 3/8-16 x .625	3
73/	351487-S2	†Washer 3/8 Lock	3
		†Plug Unused Holes in Transmission	
73/	TEAA-7085-A	Retainer - Transmission Bearing	1
73/	C5TZ-7086-F	Gasket - Transmission Bearing Retainer	1
73/	42998-S8	Bolt 3/8-16 x 1.0 Self Locking	4
73/	43004-S8	Bolt 3/8-16 x 1.75 Self Locking	1
73/	C1TT-4813-C	Retainer - Coupling Shaft Grease	1
73/	01T-7089	Flange - Output	1
73/	D3JL-7210-A	Lever - Gear Shift - Engine So or Power Unit	1
73/	TEAA-7210-A	Lever - Gear Shift - Engine Std.	1
73/	8MTH-7207	Gasket - Shift Lever Cap	1
73/	C0TT-7B125-A	Trunnion - Shift Lever	1
73/	B-7227	Spring - Shift Lever	1
73/	8MTH-7228	Seat - Shift Lever Spring	1
73/	TEAA-7213-A2	Ball - Shift Lever	1
73/	33925-S8	Nut - 3/8-24	1
73/	01T-17285-A	Gear - Speedometer Drive	1
73/	8J-17288-A	Spacer - Speedometer Drive Gear	1
73/	ESE-M2C-39-A	Transmission Lubricant (Pints)	6
		REAR ENGINE PLATE AND FRONT DUST COVER	
70/	C5TZ-7007-E	Plate Assembly - Engine Rear	1
70/	43040-S8	Bolt - 7/16-14 x 1.0 Lock	3
70/	C5TZ-7564-C	Dust Cover - Front	1
70/	304650-S	Bolt - 3/8-16 x 3/4	1
70/	34792-S36	Washer - 3/8 Lock	2
70/	33799-S8	Nut - 3/8-16	4
		POWER TAKE-OFF ASSEMBLY WITH 11-1/2" H.D. OVER-CENTER CLUTCH	
70/	C2JZ-7275-A	P.T.O. Assembly	1
70/	20388-S8	Bolt - 3/8-16 x 1.0	12
70/	34792-S36	Washer - 3/8 Lock	12
70/	C2JZ-7278-A	Drive Ring - Cast Iron	1
70/	58639-S2	Bolt - 3/8-16 x 2.25 Grade 8	8
70/	44877-S2	Washer - 3/8 Flat Washer - Hardened	8
		Order Power Take-Off Service Parts for C2JZ-7275-A from your Industrial Product Distributor in your area or directly from: Rockford Clutch Division, Rockford, Illinois.	

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	C5JZ-7275-B	POWER TAKE-OFF ASSEMBLY	
70/	304819-S2	H.D. FOR SPRING LOADED CLUTCH (F-10-101)	1
70/	34810-S8	P.T.O. Assembly	2
		Bolt - 9/16-12 x 1.88	2
		Washer - 9/16 Lock	
		Order Power Take-Off Service Parts for C5JZ-7275-B from your Industrial Products Distributor in your area or directly from: Funk Manufacturing Co., P.O. Box 577, 1211 West 12th Street, Coffeyville, Kansas.	
		POWER TAKE-OFF ASSEMBLY – TORQUE CONVERTER TYPE – INCLUDES PUMP AND OIL COOLER	
70/	D2JL-7275-A	P.T.O. Assembly	1
70/	C3AZ-7A103-E	Pump Assembly - Front	1
70/	371454-S	*Bolt - 5/16-18 x 2	4
		* Attach Front Pump to P.T.O.	
70/	B1AZ-7A136-A	Gasket - Pump	1
70/	20470-S8	†Bolt - 7/16-14 x 1-1/2	4
70/	34808-S8	†Washer - 7/16 Lock	4
		† Attach P.T.O. to Converter Housing	
70/	B7D-7870-A	Cooler - Transmission Oil	1
70/	357863-S	Elbow - 45° x 3/8 Pipe	1
70/	B6D-8289-A	Tee - Water Return	1
70/	B7A-8287-B	Clamp - Radiator Hose	2
70/	C5JZ-7B093-A	Hose - Oil Cool Water - Out	1
70/	C5JZ-7B093-B	Hose - Oil Cool Water - In	1
70/	B7A-8287-A	Clamp - Cooler Hose	4
70/	7RA-18481	Bracket - Hose	3
70/	358347-S	Clip	2
70/	20330-S8	Bolt - 7/16-14 x 5/8	2
70/	34808-S8	Washer - 7/16 Lock	2

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/ 70/ 70/ 70/ 70/	C5TA-7550-L C5TA-7563-F 382087-S2 34846-S8 D1TZ-7548-B	CLUTCH ASSEMBLY 12 INCH H.D. 1-3/8" - 10 SPLINE Disc Assembly - Clutch Pressure Plate and Cover Assembly Bolt - 5/16-18 x .92 Hex Washer - 5/16 Lock Bearing and Hub Assembly - Clutch Release	1 1 6 6 1
70/ 70/	C5TZ-7600-C C5TZ-7600-B	CLUTCH PILOT BEARING Bearing - Clutch Pilot - Bronze Bearing - Clutch Pilot - Ball for Spring Loaded Clutch	1 1

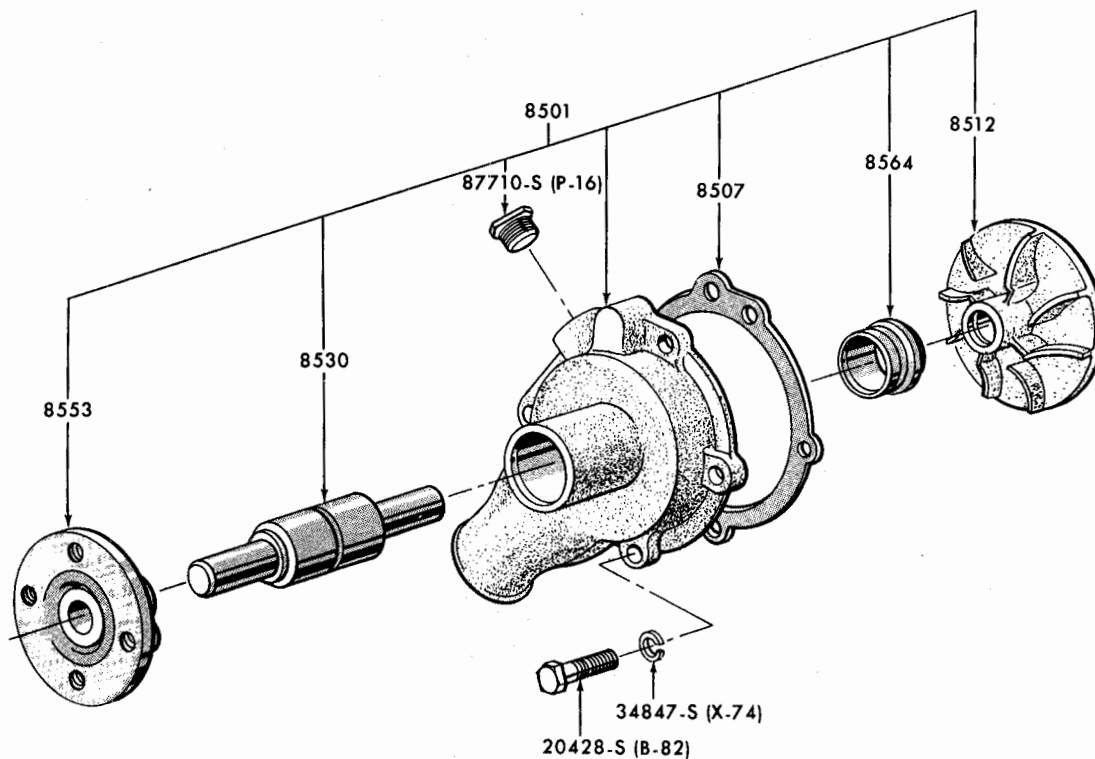

WATER PUMP

P-4731


70/ 70/ 70/ 70/74 75/ 70/ 70/ 70/74 75/ 70/ 70/ 70/	D5TZ-8501-A C5AZ-8507-A 304664-S2 C5AZ-8512-A D5TZ-8512-A C6DZ-8530-C B4A-8553-A B2AZ-8564-D D5TZ-8564-A C5AZ-8509-A B7T-8538-A 42908-S8	WATER PUMP AND PULLEY Water Pump Assembly Water Pump Gasket Bolt - 5/16-18 x 7/8 Water Pump to Block Water Pump Impeller Water Pump Impeller Water Pump Shaft and Bearing Water Pump Pulley Hub Water Pump Seal Water Pump Seal Pulley - Single Sheave Clamping Ring - Water Pump Pulley Screw and Washer 5/16-24 x 5/8 Attach Pulley and Ring to Water Pump	1 1 4 1 1 1 1 1 1 1 1 1
--	---	---	--

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		THERMOSTAT AND OUTLET CONNECTION – HIGH FAN	
70/	C2UZ-8575-B	Thermostat Assembly - 160°	1
70/	C5JZ-8592-B	Connection - Water Outlet	1
70/	C5JZ-8255-A	Gasket - Outlet Connection	1
70/	C5AE-9C322-A	Bracket - Fuel Pump to Carburetor Tube	1
70/	376255-S	Bolt - 5/16-18 x .88	2
70/	42998-S8	Bolt - 3/8-16 x 1.0	2
		FAN – LO MOUNT	
70/	EAG-8600-B	Fan Blade - 5 Blade - 17 Inch Suction	1
		FAN ASSEMBLY – HI MOUNT	
70/	C5JZ-8600-N	Fan Blade - 6 Blade - 18.5 Inch Suction	1
70/	C5JZ-8625-C	Bracket and Pulley Assembly	1
70/	42760-S8	Screw and Washer Assembly - 5/16-18 x 7/8	4
70/	C5JZ-8633-A	Guide - Fan Bracket	1
70/	88423-S8	Stud - 7/16-14-20 x 1.88	2
70/	351428-S8	Washer - 7/16 Flat	2
70/	34372-S8	Nut - 7/16-20 Hex Lock	2
70/	C7JZ-8620-H	Belt - Fan 1/2 x 40.4	1
		SENDING UNIT – OIL PRESSURE	
70/	C5AZ-9278-A	Sending Unit	1
		FUEL PUMP ASSEMBLY	
70/	D2TE-9350-RA	Pump Assembly - Fuel	1
70/	C3AZ-9417-B	Gasket - Fuel Pump	1
70/	20426-S8	Bolt - 5/16-18 x 1.25	2
70/	34791-S36	Washer - 5/16 Lock	2
70/	C2AA-9324-A	Hose - Fuel Tube Connector	1
70/	376545-S8	Clamp - Hose	2
		FUEL LINE ASSEMBLY	
70/	C5JZ-9369-B	Tube Assembly - Fuel Pump to Carburetor - Used with Mechanical Governor	1
70/	B2AZ-9A317-A	Clip - Fuel and Vacuum Line	1
70/	D0JJ-9369-A	Fuel Line Assembly - Without Mechanical Governor	1
70/	B2AZ-9A317-A	Clip - Fuel and Vacuum Line	1
		MANIFOLD ASSEMBLY – INTAKE	
70/	C5AZ-9424-E	Manifold Assembly	1
70/	C5AZ-9461-A	Gasket - Intake Manifold to Block	1
		MANIFOLD ASSEMBLY – EXHAUST	
70/	D5TZ-9426-A	Manifold Assembly	1
70/	C5AZ-9A430-A	Shaft and Counterweight Assembly - Exhaust Control Valve	1
70/	D1AZ-9443-A	Clamp - Intake and Exhaust Manifold	13
70/	C5AZ-9449-A	Spring - Exhaust Control Valve	1
70/	C5AZ-9A458-A	Spring - Exhaust Control Valve Stop	1
70/	C5AZ-9460-A	Valve - Exhaust Control	1
70/	C5AZ-9462-A	Bushing - Exhaust Control Valve	1
70/	C5AZ-9462-B	Bushing - Exhaust Control Valve	1
70/	C5AZ-9463-A	Pin - Exhaust Control Valve Coil	1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		ALTERNATOR ASSEMBLY – 12V 42 AMP	
70/75	34670-S	Nut - 7/16-14	1
70/75	C5AZ-10344-K	Pulley	1
70/75	C5TZ-10145-G	Arm - Adjusting	1
70/75	42960-S8	Bolt - 5/16-18 x 1-1/2 - Attach Arm Through Front	
		Cover to Cylinder Block	1
70/75	42999-S8	*Bolt - 3/8-16 x 1-1/8 Lock	1
70/75	352981-S8	*Washer - 3/8 Flat	1
		*Attach Arm to Alternator	
70/75	C9PZ-8620-T	Belt - Drive - 15/32 x 41.31 NL - 15/32 x 42.03 OC	1
70/75	34053-S8	†Nut - 10-32 Hex	3
70/75	34803-S7	†Washer - No. 10 Lock	3
70/75	33795-S8	†Nut - 1/4-28 Hex	1
70/75	34805-S7	†Washer - 1/4 Lock	1
		†Attach to Alternator Terminals	
70/75	C6JZ-10344-A	Pulley - Alternator - Use with Mechanical Governor	1
70/75	C5AF-10380-B	Fan - Alternator - Use with Mechanical Governor	1
	D2AZ-10346-C	Consists of:	
		BEARING – FRONT	
	A8AZ-10094-B	Bearing - Front - 21/32 ID x 1-9/16 OD x 15/32 Wide - No. 1203 RR (Federal) or 203-CC (B.C.A.) or 203-KDD (Fafnir)	1
	D0AZ-10B301-A	BOARD KIT – PRINTED CIRCUIT	
		Board Kit - Printed Circuit	1
		Consists of:	
		(1) C8AF-10B301-A Board Assy - Circuit	
		(9) C9AF-10B306-A Ring - Solder	
		(2) 374412-S100 Washer	
		(2) 383255-S8 Nut and Washer	
		(2) 383758-S8 Screw	
	D0AZ-10304-A	RECTIFIER ASSEMBLY	
		Rectifier Kit	1
		Consists of:	
		(1) D0AF-10304-B Rectifier Assembly	
		(1) C7AF-10A383-A Insulator	
		(2) 374412-S100 Washer - 1/4 Conical	
		(1) 383255-S8 Nut and Washer - No. 10-24	
		(2) 383256-S8 Nut and Washer 1/4-20	
		(2) 383758-S8 Screw - No. 10-24 x 1-37-64	
	383255-S	Nut and Washer Assembly - No. 10-24	6
	383256-S	Nut and Washer Assembly - 1/4-20	2
	383758-S	Screw - No. 10-24 x 1-37/64	2
	374412-S100	Washer - 1/4 Conical	2
	D2OZ-10A304-A	BEARING – REAR	
		Bearing - Rear - 21/32 ID x 15/16 OD x 11/16 Wide	1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/72 73/	C3SZ-10328-A	RING – ROTOR SLIP Ring - Rotor Slip	1
	C5AZ-10329-D	INSULATOR – TERMINAL Insulator - Terminal - White - 9/32 ID x 5/8 OD x 1/4 Thick	1
	C5AZ-10329-C	Insulator - Terminal - Approx. 1/16 x 3/4 x 1	1
	C5AZ-10330-A	SHAFT – ROTOR Shaft - Rotor	1
	D2OZ-10333-B	HOUSING – FRONT Housing - Front	1
	D3OZ-10333-B	Housing - Front	1
	379201-S100	Screw - No. 10-32 x 3/8	3
	C9ZZ-10334-A	HOUSING – REAR Housing - Rear	1
	378466-S100	Bolt - Hex Washer Head - No. 10-24 x 2-1/8	3
	C5DZ-10335-C	ROTOR ASSEMBLY Rotor Assembly - Incl. Stop Ring	1
	C5AZ-10336-A	STATOR ASSEMBLY Stator Assembly - Inc. Coil	1
	C6VY-10347-A	BRUSH AND TERMINAL SET Brush and Terminal Set Consists of: (1) C6VF-10A367-A Brush and Terminal (1) C6VF-10A367-B Brush and Terminal	1
	383757-S	Screw - No. 10-24 x .65 - Brush Terminal	1
	C5AZ-10349-A	SPRING – BRUSH Spring - Brush	2
	C5AZ-10351-A	HOLDER – BRUSH Holder - Brush	1
	D2OZ-10A355-A	RETAINER – FRONT BEARING Retainer - Front Bearing	1
	379201-S100	Screw - Hex Head - No. 10-32 x 3/8	3
	C5AZ-10A360-A	STOP – ROTOR Stop - Rotor	1
	C3SZ-10A361-A	INSULATOR – STATOR END Insulator - Stator End	2

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
	C9SZ-10A383-A	INSULATOR KIT – TERMINAL Insulator Kit - Terminal Consists of: (1) C7AF-10329-D Insulator - Terminal (1) C7AF-10A383-A Insulator - Diode Plate (1) C9SF-10A883-A Insulator - Diode Plate	1
	D1AZ-10A383-A	INSULATOR KIT – BATTERY TERMINAL Insulator Kit - Battery Terminal Consists of: (1) D0AZ-10A383-A Insulator - Diode Plate (1) D0AF-10329-A Insulator - Terminal	1
	378466-S100	BOLT – THRU Bolt - Hex Head - No. 10-24 x 2-1/8	3
	C6AZ-18827-A	CAPACITOR – RADIO Capacitor - Radio	1
75/	D3JL-10346-A	ALTERNATOR – MOTOROLA – 12V – 37 AMP Alternator	1
75/	C5AZ-10A313-C1	Bracket - Alternator Mounting	1
75/	42996-S8	*Bolt - 3/8-16 x 3/4 Locking *Attach Bracket to Block	3
75/	385049-S100	†Spacer	1
75/	302559-S8	†Bolt 7/16-14 x 4.25	1
75/	34808-S8	†Washer 7/16 Lock	1
75/	34670-S	†Nut 7/16 †Attach Alternator to Mtg. Bracket	1
75/	C5TZ-10145-G	Arm - Alternator Adjusting	1
75/	42960-S8	@Bolt 5/16-18 x 1-1/2 @Attach Arm thru Front Cover to Block	1
75/	42999-S8	%Bolt 3/8-16 x 1-1/8 Locking	1
75/	352981-S8	%Washer 3/8 Flat %Attach Adj. Arm to Alternator	1
75/	D3JL-10A352-B	Pulley - Alternator - 1 Sheave	1
75/	C7JZ-10344-B	Pulley - Alternator - 3 Sheave	1
75/	C9PZ-8620-T	Belt - Alternator and Water Pump	1

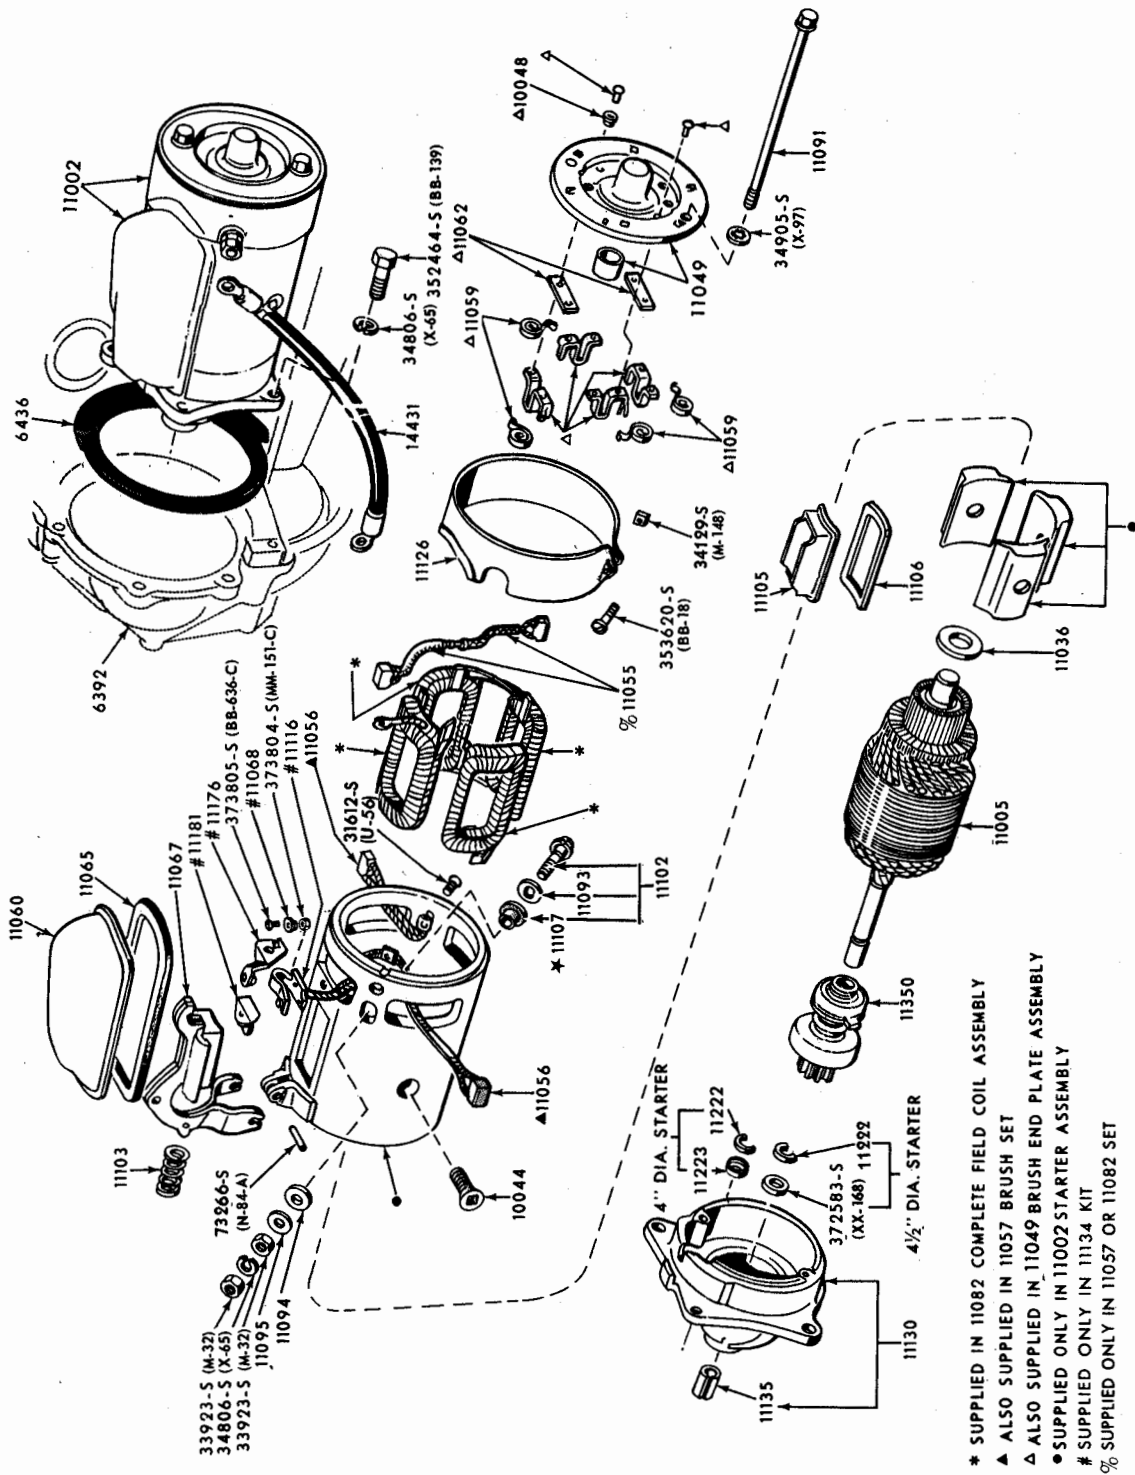


STARTER & DRIVE ASSEMBLY (FORD 12 VOLT)

- * SUPPLIED IN 11082 COMPLETE FIELD COIL ASSEMBLY
- ▲ ALSO SUPPLIED IN 11057 BRUSH SET
- ▲ ALSO SUPPLIED IN 11049 BRUSH END PLATE ASSEMBLY
- SUPPLIED ONLY IN 11002 STARTER ASSEMBLY
- # SUPPLIED ONLY IN 11134 KIT
- % SUPPLIED ONLY IN 11057 OR 11082 SET

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/ 70/ 70/ 70/	D6OZ-11002-A C6JZ-6404-A 376587-S8 34782-S8	STARTER MOTOR ASSEMBLY Starter Motor - 12V Decal - 12V Electrical System Bolt - 3/8-16 x 1.12 Washer Head Washer - 3/8 Trapezoidal Lock	1 1 2 2
	D6OZ-11002-A	Consists of:	
	D0AZ-11005-A D0AZ-11K013-A C0DZ-11036-A C6VY-11036-A C4TZ-11049-A D3AZ-11052-A 18-11056 C0DZ-11057-B	Armature Seal - Rear Housing Washer - Armature Thrust Washer - Drive Thrust Plate and Bushing - Brush End Bushing - Brush End Plate Bushing - Non-Insulated Brush Set Consists of: (1) C5AF-11055-A Brush (1) C0DF-11056-B Brush (1) Instruction Sheet (1) 18-11056 Brush (1) 25247-S7 Screw	1 1 1 1 1 1 1 1
	D1AZ-11059-A C0DZ-11060-C C0DF-11065-A C0DF-11067-B C2DZ-11068-A D6AZ-11082-A C2OZ-11083-D C3AZ-10120-A B5A-11095-A C0DZ-11102-C	Spring - Brush Cover - Plunger Gasket - Cover Lever - Drive Insulator - Switch Coil - Field, Complete Coil - Actuating Bolt - 1/4-20 x 9/16 Washer - Field Terminal Screw Field Terminal Kit Consists of: (1) B5A-11093-A Washer (1) 18-11094-B Washer (1) B5A-11095-A Washer (1) 34806-S7 Washer-Lock (1) C0DF-11102-B Terminal (1) 18-11107-B Bushing (2) 33923-S7 Nut	4 1 1 1 1 1 1 2 1 1
	C1VF-11103-A C0DF-11105-A C0DF-11106-A 18-11107-B C2OZ-11126-A 27185-S2 34141-S8 D1AZ-11130-C	Spring - Plunger Return Sleeve - Coil Retaining Flange - Coil Retaining Insulator - Field Terminal Band - Cover Screw - Round Head 10-32 x 1-5/8 Nut - Square - 10-32 Housing Kit - Drive End Consists of: (1) D0AZ-11K013-A Seal (1) C2DZ-11222-A Ring (1) C2DZ-11223-A Retainer (1) C6VY-11383-A Washer (1) D0AF-11130-G Housing (1) Instruction Sheet (1) D1PF-11A130-AA Lubricant	1 1 1 1 1 1 1 1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/ 70/		STARTER MOTOR ASSEMBLY – Continued	
	D6OZ-11002-A	Consists of:	
	C2OZ-11134-B	Contact Point Kit	1
		Consists of:	
		(1) C2DZ-11068-A Insulator	
		(1) C2OZ-11181-A Insulator	
		(1) C2OF-11116-B Spring	
		(1) 57013-S2 Screw	
		(1) C2OZ-11176-B Post	
		(1) Instruction Sheet	
	D0AZ-11135-B	Bearing - Drive End	1
	C2OZ-11176-B	Post - Contact	1
	C2OZ-11181-A	Insulator - Switch Spring	1
	C2DZ-11222-A	Ring - Drive Stop	1
	C2DZ-11223-A	Retainer - Drive Stop Ring	1
	D6PZ-11350-B	Drive Kit - With Attaching Parts	1
	68-10044	Screw - Pole Piece - 7/16-14 x 21/32	3
		COIL ASSEMBLY	
	B6A-12029-B	Coil Assembly - Ignition	1
	B8S-12043-B	Strap Assembly - Ignition Coil	1

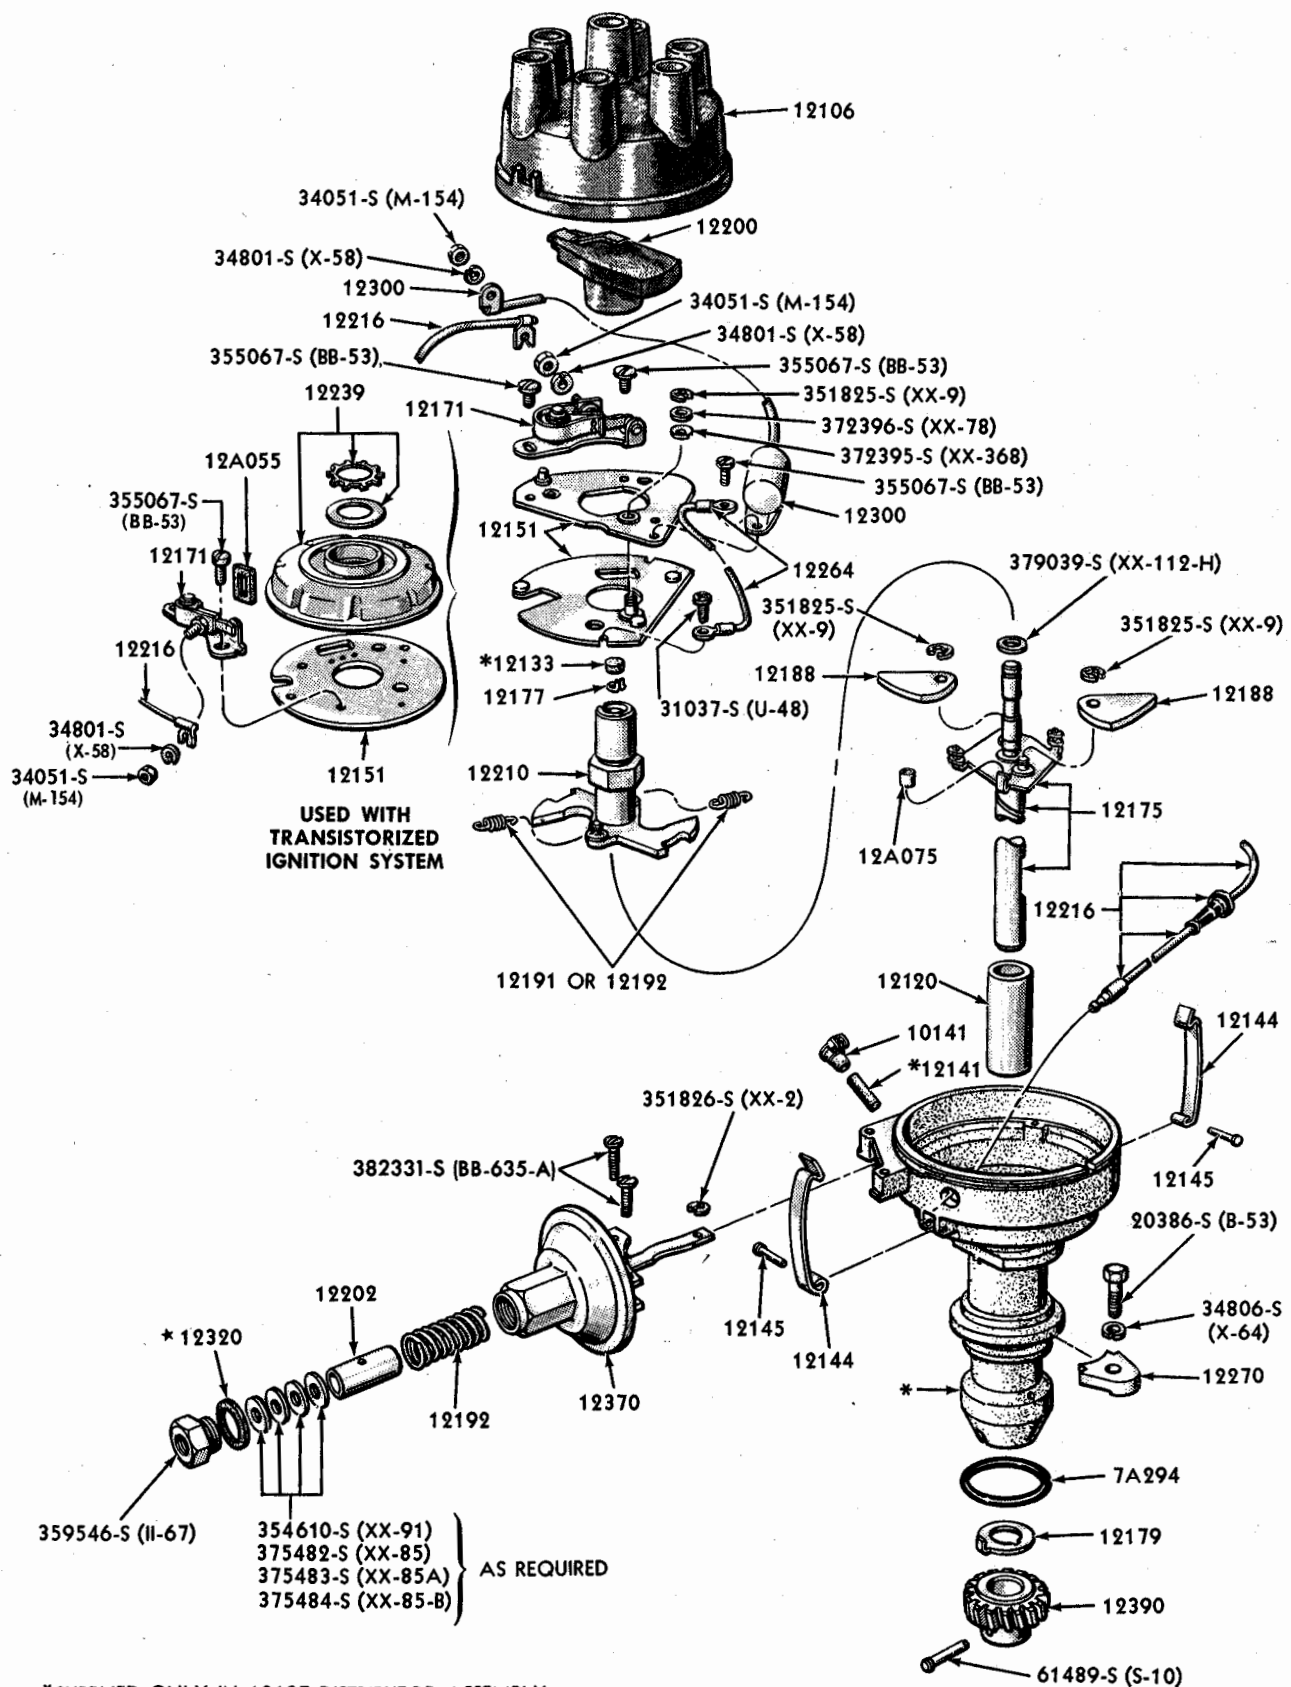

*SUPPLIED ONLY IN 12127 DISTRIBUTOR ASSEMBLY

P-5825

DISTRIBUTOR - TYPICAL

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	D3JF-12127-CA	DISTRIBUTOR Distributor Assembly - Less Cap and Rotor	1
70/	C5AZ-12000-D	TUNE UP KIT – DISTRIBUTOR Tune Up Kit Consists of: (1) C9AZ-12171-B Point Set (1) C5TZ-12200-B Rotor (1) C9AZ-12300-A Condenser	1
70/	7HA-12106	CAP – DISTRIBUTOR Cap	1
70/	C5TZ-12200-B	ROTOR – DISTRIBUTOR Rotor	1
70/	C3AZ-12270-A	CLAMP – DISTRIBUTOR TO CYLINDER BLOCK Clamp	1
	D3JF-12127-CA	DISTRIBUTOR Consists of:	
	B6A-10141-A	Cup - Oil	1
	C2AZ-12A075-A	Sleeve - Shaft Plate	1
	C5AZ-12120-A	Bushing - Distributor Housing	1
	7RA-12144	Clamp - Terminal Housing Hold Down	2
	B-12145	Rivet - Terminal Housing Hold Down Clamp	2
	D2PZ-12151-B	Plate Assembly - Breaker - Less Points	1
	C9AZ-12171-B	Point Set Assembly - Breaker Arm and Contact - Pivot Type	1
	34801-S7	Lockwasher - No. 6	1
	34051-S36	Nut - No. 6-32	1
	D2TZ-12175-A	Shaft Assembly	1
	B7A-12177-A	Retainer - Cam	1
	C8AZ-12179-A	Washer - Distributor Shaft Thrust - Upper	1


YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
	D3JF-12127-CA	DISTRIBUTOR – Continued Consists of:	
	C5AZ-12188-A	Weight Assembly - Distributor	2
	351825-S	Washer - "C" Type	2
	C7VY-12216-A	Wire Assembly - Primary Terminal	1
	C8JJ-12239-B	Dust Cover	1
	34801-S7	Lockwasher - No. 6	1
	34051-S7	Nut - No. 6-32	1
	D2AZ-12264-A	Wire Assembly - Distributor Breaker - Ground	1
	50507-S8	Screw - No. 8-32 x 3/8 - Pan Head	2
	C9AZ-12300-A	Condenser Assembly	1
	D2TZ-12370-B	Diaphragm Assembly - Distributor	1
	382331-S2	Screw - No. 8-32 x 1.00	2
	351826-S	Retainer - "C" Type Washer - Diaphragm Rod	1
	C5TZ-12390-A	Gear - Distributor Driven	1
	61489-S	Pin - 1/8 x 1/4 Coiled	1
		IGNITION RESISTOR	
70/	B8A-12250-A	Resistor - Ignition Coil	1
70/	B6P-14495-B	Wire - Coil to Resistor	1
70/	B6P-14474-A	Terminal - Snap-On	1
70/	34656-S8	Nut and Washer - 10-32	1
70/	D4UZ-12298-A	Wire Assembly - Coil to Distributor	1
		HOSE – DISTRIBUTOR VACUUM	
70/	C8DE-12226-G	Hose - Distributor Vacuum - Use with D0JJ-9510-A Carb.	1
		SPARK PLUG ASSEMBLY	
70/	D3TZ-12405-A	Spark Plug Assembly	6
70/	D5PZ-12259-A	Wire Set - Spark Plug	1
		GOVERNOR – MECHANICAL	
70/	C5JZ-12450-H	Governor Assembly - Variable Speed	1
70/	C7JZ-12448-A	Kit - Governor Attaching	1
70/	C7JZ-8620-P	Belt - 3/8 x 25.625	1
	C7JZ-12448-A	Consists of:	
	C7JZ-12454-B	Bracket - Governor Mount	1
	20389-S7	Bolt - 3/8-24 x 1.0	3
	44726-S7	Washer - 3/8 Flat	3
	34827-S2	Washer - 3/8 Lock	3
	C5JZ-99819-B	Rod - Throttle	1
	C5JZ-99810-A	Ball Joint - 1/4-28	2
	33796-S7	Nut - 1/4-28 Hex	4
	34905-S	Washer - 1/4 Lock	2
	20428-S8	Bolt - 3/8-16 x 1.25 Hex	1

POWER UNIT SECTION

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
	POWER UNIT SECTION		
		SUPPORT ASSEMBLY – FRONT ENGINE AND RADIATOR	
70/	C5JZ-5019-D	Engine Front Radiator Support	1
70/	43039-S8	Bolt - 7/16-14 x 7/8 Self Locking	3
70/	43044-S8	Bolt - 7/16-14 x 1.5 Self Locking	1
70/	380079-S2	Washer - 7/16 Flat	4
		EXHAUST PIPE AND MUFFLER INLET PIPE	
70/	C5JZ-5218-A	Pipe Assembly - Exhaust	1
70/	375678-S2	Stud - 7/16-14 x 1.62	2
70/	34808-S8	Washer - 7/16 Lock	2
70/	375636-S100	Nut - 7/16-14 - Coated	2
70/	C5JZ-9450-A	Gasket - Exhaust Pipe	1
70/	C4JZ-5246-A	Pipe - Muffler - Inlet Exhaust	1
70/	A9AA-5A231-B	Clamp - Muffler Inlet Pipe	1
		SUPPORT – ENGINE REAR AND TRANSMISSION USED WITH TRUCK CLUTCH HOUSING	
70/	C0JZ-6096-A	Bracket - Engine Rear	1
70/	C2JZ-5059-A	Support - Engine Rear	2
70/	20489-S8	*Bolt - 3/8-24 x 1.62	4
70/	33800-S8	*Nut - 3/8-24	4
70/	34792-S36	*Washer - 3/8 Lock	4
		*Attach Support to Bracket	
70/	304834-S2	†Bolt - 1/2-13 x 2.0	2
70/	33845-S8	†Nut - 1/2-13	2
70/	34809-S8	†Washer - 1/2 Lock	2
70/	44734-S8	†Washer - 1/2 Flat	2
		†Attach Support to Clutch Housing	
		SUPPORT – ENGINE REAR AND TRANSMISSION USED WITH TORQUE CONVERTER HOUSING	
70/	C0JZ-6096-A	Bracket - Engine Rear	1
70/	C2JZ-5059-A	Support - Engine Rear	2
70/	20489-S8	\$Bolt - 3/8-24 x 1.62	4
70/	33800-S8	\$Nut - 3/8-24	4
70/	34792-S36	\$Washer - 3/8 Lock	4
		\$Attach Support to Bracket	
70/	385011-S	@Bolt - 9/16-12 x 1-1/4	2
70/	34810-S8	@Washer - 9/16 Lock	2
		@Attach Housing to Support	

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		RADIATOR ASSEMBLY	
		USE WITH SUCTION FAN ONLY	
70/	D0JJ-8005-E	Radiator Assembly - 8 Fins/Inch - McCord 7961-F9 Plym. IND	1
70/	C7TZ-8100-B	Cap - Radiator - 7 PSI	1
70/	D0JJ-8146-B	Shroud Assembly - Fan	1
70/	357622-S8	Screw and Washer Assembly - 8-32 x 3/8	4
70/	8A-8115	Drain Cock Assembly	1
70/	7C-8125-A	Pad - Radiator	2
70/	351655-S8	Bolt - 7/16-14 x 2 - Carriage	2
70/	NCA-22275-A	Spring	2
70/	44734-S	Washer - 1/2 Flat	2
70/	34670-S8	Nut - 7/16-14	2
70/	C5JZ-8260-B	Hose Assembly - Radiator Upper	1
70/	C5JZ-8286-D	Hose Assembly - Radiator Lower	1
70/	B7A-8287-B	Clamp Assembly - Radiator Hose	4
70/	C5JZ-8046-B	Brace - Radiator	1
70/	33799-S8	Nut - 3/8-16 8019-D	1
70/	34792-S36	Washer - 3/8 Lock	1
70/	D0JJ-8A045-A	Spacer - Radiator	1
		ENGINE AIR CLEANER	
70/	C4JZ-9600-C	Air Cleaner - Use with Mechanical and Velocity Governor	1
70/	C4JZ-9628-C	Clamp	2
70/	304635-S	Bolt - 5/16-24 x 5/8	4
70/	33798-S8	Nut - 5/16-24	4
70/	34791-S36	Washer - 5/16 Lock	4
70/	59B-9613	Clamp - Carburetor to Air Cleaner Hose	2
70/	C5JZ-9520-B	Elbow	1
70/	C0JZ-9652-A	Hose	1
70/	D4JL-9654-A	Gasket - Elbow	1
		CHOKE CONTROL	
70/	C1JZ-9700-A	Choke Assembly for Mechanical Governor Installation	1
70/	33848-S8	Nut - 9/16-18	1
70/	34910-S8	Washer - 9/16 Int. Lock	1

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
70/	C6JZ-9775-J	THROTTLE ASSEMBLY Throttle Control Assembly - Vernier Type - Use with Mechanical Governor	1
70/	C6JZ-9740-A	Clevis Assembly	1
70/	73879-S8	Pin - Clevis 1/4 x 13/16	1
70/	44719-S8	Washer - 1/4 Flat	1
70/	72015-S8	Pin - Cotter 1/16 x 3/4	1
70/	B2AZ-9A317-A	Clip	1
		INSTRUMENTS AND WIRING - 12V - 42 AMP FORD ALTERNATOR INSTALLATION ONLY	
70/75	C4JZ-10970-C	Gauge - Water Temperature	1
70/75	FAA-10899-A	Bracket - Water Temperature Gauge	1
70/75	34656-S	Nut and Lockwasher - Attach Bracket to Gauge	2
70/75	C4JZ-10911-A	Adapter - Water Temperature	1
70/75	8M-18954	Clamp	1
70/75	2C-11500-A	Button Assembly - Starter	1
70/75	C1JZ-14522-B	Lamp Assembly - Signal - Oil Pressure	1
70/75	C1JZ-14522-A	Lamp Assembly - Signal - Alternator	1
70/75	C5JZ-13466-A	Bulb - Lamp 12V - 4 Amp Warning Light	2
70/75	C5JZ-11572-A	Switch Assembly - Ignition with Keys	1
70/75	B6P-14487-A	Connector - Double	2
70/75	B6P-14487-B	Connector - Single	1
70/75	B6AZ-11450-A	Relay - Starter Motor	1
70/75	35031-S8	Screw - 1/4-20 x .625	2
70/75	34805-S7	Washer - 1/4 Lock	2
70/75	33795-S8	Nut - 1/4-20	2
70/75	C2RZ-14431-C	Cable Assembly - Relay to Starter	1
70/75	358347-S	Clip - Harness	1
70/75	20330-S8	Bolt - 7/16-14 x 5/8	1
70/75	34808-S7	Washer - 7/16 Lock	1
70/75	358347-S	Clip	1
70/75	356640-S	Clip	2
70/75	C5JZ-14305-C	Wiring Harness - Alternator to Voltage Regulator	1
70/75	C3JZ-14497-A	Wire Assembly - Resistor to Ignition	1
70/75	34081-S8	Nut - 1/4-28 Hex	2
70/75	34806-S7	Washer - 1/4 Lock	2
70/75	D3TZ-10316-A	Regulator - Alternator - 12V - 42 Amp	1

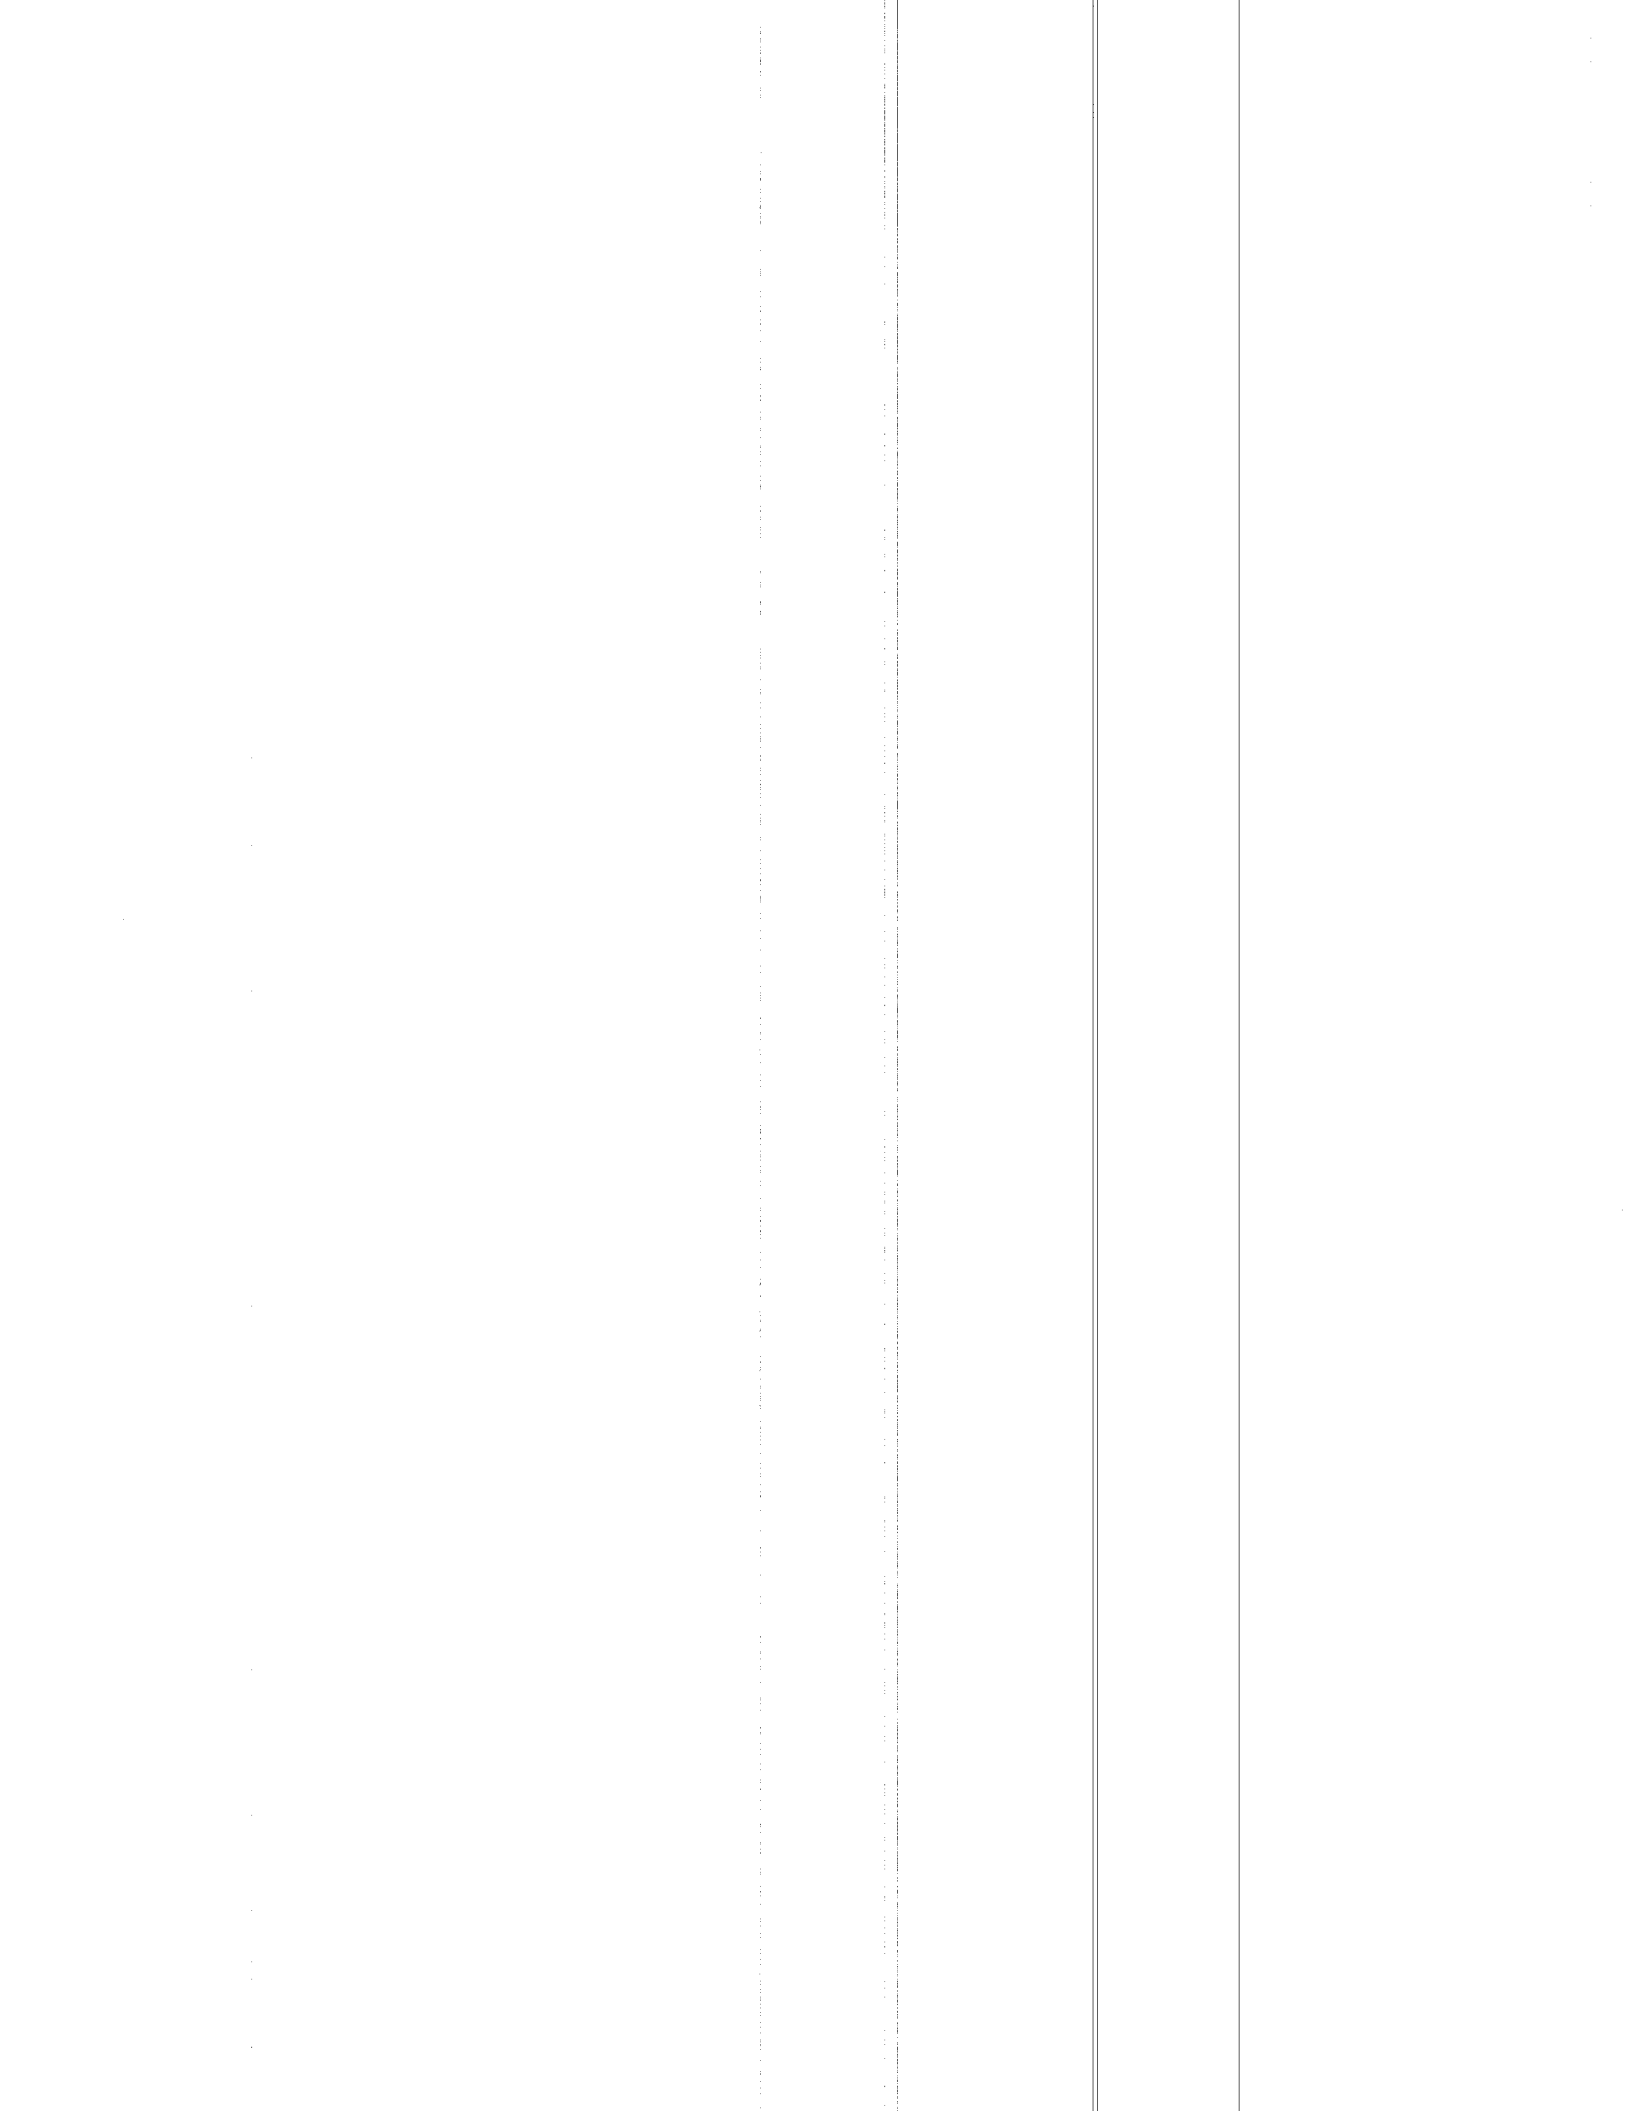

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		INSTRUMENTS AND WIRING – 12V – 37 AMP MOTOROLA ALTERNATOR INSTALLATION ONLY	
75/	C4JZ-10970-C	Gauge - Water Temperature	1
75/	FAA-10899-A	Bracket - Water Temperature Gauge	1
75/	34656-S	Nut and Lockwasher - 10-32 - Attach Bracket to Temp. Gauge	2
75/	C4JZ-10911-A	Adapter - Water Temp. Gauge	1
75/	8M-18954	Clamp - Water Temp. Gauge	1
75/	2C-11500-A	Button - Starter	1
75/	C5JZ-11572-A	Switch - Ignition	1
75/	C1JZ-14522-A	Socket - Alternator Warning Light	1
75/	C1JZ-14522-B	Socket - Oil Pressure Warning Light	1
75/	C5JZ-13466-A	Bulb - Warning Light	2
75/	B6AZ-11450-A	Relay - Starter Motor	1
75/	35031-S8	Screw - 1/4-20 x .625	2
75/	34805-S7	Washer - 1/4 Lock	2
75/	33795-S8	Nut - 1/4-20	2
75/	D3JL-10316-A	Regulator - Voltage	1
75/	38204-S36	Screw - 10-32 x .50	3
75/	34656-S	Nut and Lockwasher	3
75/	D4UZ-12298-A	Wire - Coil to Distributor	1
75/	C2RZ-14431-C	Cable - Starter Relay to Starter	1
75/	D3JL-14305-A	Harness - Main Wiring	1
75/	34805-S7	*Washer - 1/4 Lock	1
75/	33795-S8	*Nut - 1/4-20	1
75/	34803-S7	*Washer - No. 10 Lock	2
75/	34053-S8	*Nut - No. 10-24	2
		* Attach Main Harness to Alternator	
75/	34791-S	†Washer - 5/16 Lock	2
75/	33797-S8	†Nut 5/16-18	2
		† Attach Main Harness to Starter Relay	
75/	B6P-14487-A	Connector - Warning Light Socket to Main Harness	1
75/	358347-S	Clip	2
75/	20330-S8	Bolt - 7/16-14 x .625	1
75/	34808-S7	Washer - 7/16 Lock	1
75/	356640-S	Clip - Harness to Push Rod Cover	2

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		HOOD TOP, REAR PANEL AND RADIATOR SHELL FOR SAE HOUSINGS	
70/	C5JZ-16621-C	Bracket - Rear Panel to Housing Cover	1
70/	C5JZ-16620-F	Bracket - Rear Panel to Rear Engine Plate	2
70/	D4JL-16924-C	Panel Assembly - Rear	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	6
70/	34791-S36	Washer - 5/16 Lock	6
70/	33798-S8	Nut - 5/16-24	6
70/	C5JZ-16612-B	Panel Assembly - Hood Top	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	14
70/	C5JZ-8200-B	Shell Assembly - Radiator	1
70/	D3JL-16607-A	Decal	2
70/	B4P-16606-A	Ford Emblem	1
70/	355891-S8	Nut - Sleeve	4
		HOOD TOP, REAR PANEL AND RADIATOR SHELL USE WITH CLUTCH HOUSING	
70/	D4JL-16924-C	Panel Assembly - Rear	1
70/	C5JZ-16621-B	Bracket - Rear Panel to Clutch Housing - Center	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	6
70/	34806-S8	Washer - 5/16 Lock	6
70/	33798-S8	Nut - 5/16	6
70/	C5JZ-16620-D	Bracket - Rear Panel to Engine - L.H.	1
70/	57632-S2	Screw and Washer Assembly - 5/16-18 x .62	1
70/	C5JZ-16620-E	Bracket - Rear Panel to Engine - R.H.	1
70/	42999-S8	Bolt - 3/8-16 x 1.12 Self Locking	1
70/	C5JZ-16612-B	Panel Assembly - Hood Top	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	14
70/	D3JL-16607-A	Decal - Pressure Sensitive	2
70/	C5JZ-8200-B	Shell Assembly - Radiator	1
70/	B4P-16606-A	Ford Emblem	1
70/	355891-S8	Nut - Sleeve	4
		HOOD TOP, REAR PANEL AND RADIATOR SHELL FOR SPLIT-TYPE HOUSING	
70/	D4JL-16924-C	Panel Assembly - Rear	1
70/	C5JZ-16621-D	Bracket - Rear Panel to SAE Housing Cover	1
70/	C5JZ-16620-F	Bracket - Rear Panel to Rear Engine Plate	2
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	6
70/	34806-S8	Washer - 5/16 Lock	6
70/	33798-S8	Nut - 5/16-24 Hex	6
70/	C5JZ-16612-B	Panel Assembly - Hood Top	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	14
70/	D3JL-16607-A	Decal	1
70/	C5JZ-8200-B	Shell Assembly - Radiator	1
70/	B4P-16606-A	Ford Emblem	1
70/	355891-S8	Nut - Sleeve	4

YEAR	PART NUMBER	DESCRIPTION	QTY. REQD.
		HOOD TOP, REAR PANEL AND RADIATOR SHELL USE WITH CONVERTER HOUSING	
70/	D4JL-16924-C	Panel Assembly - Rear	1
70/	C5JZ-16621-F	Bracket - Rear Panel to Converter Housing - Center	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	6
70/	34806-S8	Washer - 5/16 Lock	6
70/	33798-S8	Nut - 5/16-24	6
70/	C5JZ-16620-K	Bracket - Rear Panel to Engine - L.H.	1
70/	57632-S2	Screw and Washer Assembly - 5/16-18 x .62	1
70/	C5JZ-16620-L	Bracket - Rear Panel to Engine - R.H.	1
70/	42999-S8	Bolt - 3/8-16 x 1.12 Self Locking	1
70/	C5JZ-16612-B	Panel Assembly - Hood Top	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	14
70/	D3JL-16607-A	Decal	2
70/	C5JZ-8200-B	Shell Assembly - Radiator	1
70/	B4P-16606-A	Ford Emblem	1
70/	355891-S8	Nut - Sleeve	4
		HOOD TOP, REAR PANEL, AND RADIATOR SHELL WITH VERNIER MOUNT THROTTLE – USE WITH FOOT MOUNTED UNIT – LESS REAR HOUSING	
70/	D4JL-16924-C	Panel Assembly - Rear	1
70/	C9JJ-16621-D	Bracket - Upper	1
70/	C9JJ-16620-D	Bracket - Side L.H.	1
70/	C9JJ-16620-E	Bracket - R.H.	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	4
70/	34791-S36	Washer - 5/16 Lock	4
70/	33798-S8	Nut - 5/16-24	4
70/	C5JZ-16612-B	Panel Assembly - Hood Top	1
70/	352628-S8	Bolt - 5/16-24 x 7/8 Washer Head	14
70/	D3JL-16607-A	Decal	2
70/	43045-S	Bolt - 7/16-14 x 1-5/8	4
70/	34808-S	Washer - 7/16 Lock	4
70/	C5JZ-8200-B	Shell Assembly - Radiator	1
70/	B4P-16606-A	Ford Emblem	1
70/	355891-S8	Nut - Sleeve	4